

WWW.HYSTER.COM

INTERNAL COMBUSTION COUNTERBALANCED FORKLIFT

PRODUCT BROCHURE

H2.0-3.5UT



FEATURES

1 HIGH STRENGTH OHG

Overhead guard featuring high strength profiled steel sections to enhance operator protection.

2 FULL SUSPENSION SEAT

Full suspension seat that offers excellent comfort, fitted with an operator's presence system as standard.

3 LOW STEP HEIGHT

Convenient step placing to suit a variety of driver heights to ensure easy access to the truck at all times.





4 WIDE VIEW MAST

The wide view mast delivers excellent visibility of the load and operator's forward field of view, optimising ergonomics and truck productivity.

5 SMALL STEERING WHEEL

The adjustable steering wheel is convenient for the operator, providing 8 degrees of tilt adjustment. Allowing for good manoeuvrability when working in confined spaces.

6 INDUSTRIAL ENGINE

The UT range of industrial engines provide good reliability and easy sourcing of replacement parts.

OVERVIEW

THE Hyster® UT Series provides the ideal solution to meet your less frequent USAGE needs, without compromising on performance.

The range

The range consists of 2,000 - 3,500 kg. IC counterbalance, pneumatic tyre forklift trucks, available in four different capacities:

2,000 KG – H2.0UT / 2,500 KG – H2.5UT

3,000 KG – H3.0UT / 3,500 KG – H3.5UT

Each model is available with diesel, LPG or dual-fuel power, a single-speed powershift transmission and a range of front end equipment options to suit varying application requirements.

Easy to operate

The ergonomically designed operator compartment, with a familiar automotive layout, means that drivers will be able to work comfortably.

A range of standard features and options help to ensure that the truck is configured to the needs of the application.

Serviceability

Due to the simplicity of the components and specifications, servicing can be carried out quickly and easily.

Low cost of ownership

The use of high quality, robust components, efficient filtration and excellent cooling helps contribute to reliable operations and lower wear and tear. This, together with the fast availability of cost-effective replacement parts helps to reduce service and maintenance requirements and costs.

Comfort

- Hyster special display with 3.5" LCD
- Large foot room on floor plate
- Dual suspension system
- Hand parking brake lever with button greatly reduces fatigue in operation
- Small diameter steering wheel with adjustable steering column

Safety and stability

- Wide view mast
- High strength overhead guard
- Muffler and engine protective system
- Low centre of gravity

Easy maintenance

- Large access area for service and repairs
- Simple components
- Computer-based diagnostics not required

Reliability and exchangeability

- Triplex plate overhead guard
- Exchangeable components across models

Environmental protection

- Noise isolation material
- Environmentally-aware design

FEATURES

ENGINEERED FOR DRIVERS WITH COMFORT, SAFETY AND ERGONOMICS



Hyster display with 3.5" LCD

- The Hyster UT Series Forklift adopts a 3.5" LCD display, providing convenient viewing of the display data when driving and operating




Hand parking brake

- Low effort to operate park brake lever
- Hand parking brake lever with button reduces operator fatigue



Large foot room

- Spacious foot room design provides comfort, convenience and safety
- Control pedals provide extra foot space which reduces operator fatigue and increases operator comfort

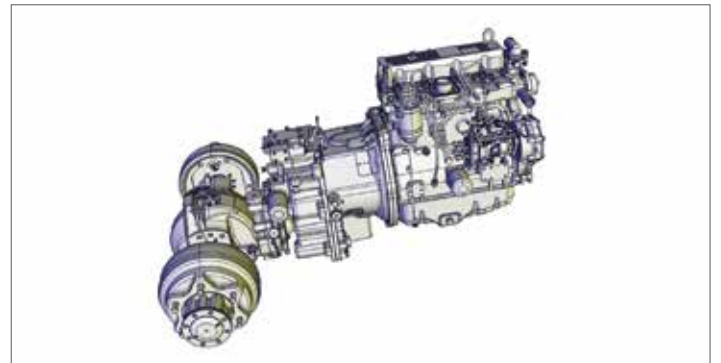

Dual suspension system

- The specialised dual-suspension system decreases vibration and noise
- Full floating safeguard/cabin system
- Engine vibration damper
- Suspended transmission replaces traditional rigid connections

FEATURES



Small diameter steering wheel with adjustable steer column

- The 300 mm diameter steering wheel is easy to manipulate, responsive, and ensures optimum mobility when working in a narrow space
- The ideally positioned steering wheel allows 8 degrees of adjustment, to suit a variety of different operators



High strength overhead guard

- Profiled steel overhead guard
- High strength roof with high strength glass enhances reliability and operator protection
- Mast composite roller structure



Wide view mast

- The wide view mast with an outside width of 720 mm, significantly improves the driver's front field of view, and increases the productivity and ergonomics of the operation



Large access area for service and repairs

- Large access space to engine compartment makes service and repairs more convenient

SERVICING



Suspension seat

- Full suspension seat offers excellent comfort
- Operator presence system as standard



Triplex plate overhead guard

- The overhead guard is developed using three pieces; left side, right side and top canopy making replacement more convenient



Exchangeable components

- Engine cover, instrument panel, display and most other components are exchangeable with other capacities in the same range
- Front fenders adaptable to single or dual wheel configuration

Improved lifting speed

- Competitive lifting speeds


OPTIONS

HYSTER® UT Series trucks feature a comprehensive range of standard equipment, with a number of options available to suit the specific needs of your application, including:

- LPG, dual-fuel or diesel
- Pneumatic-shaped solid, or dual tyres
- Various fork lengths
- Integral sideshift
- Swing-out drop down LPG bracket
- Rear, LED work light
- Strobe light
- Backup alarm
- High air intake with pre-cleaner
- Tilt cylinder boots
- Various mast heights
- 3 way catalytic purifier on LPG engines
- Glass roof
- Front window with wiper

Please refer to the Price List for full option configurations.

TRUCK DIMENSIONS

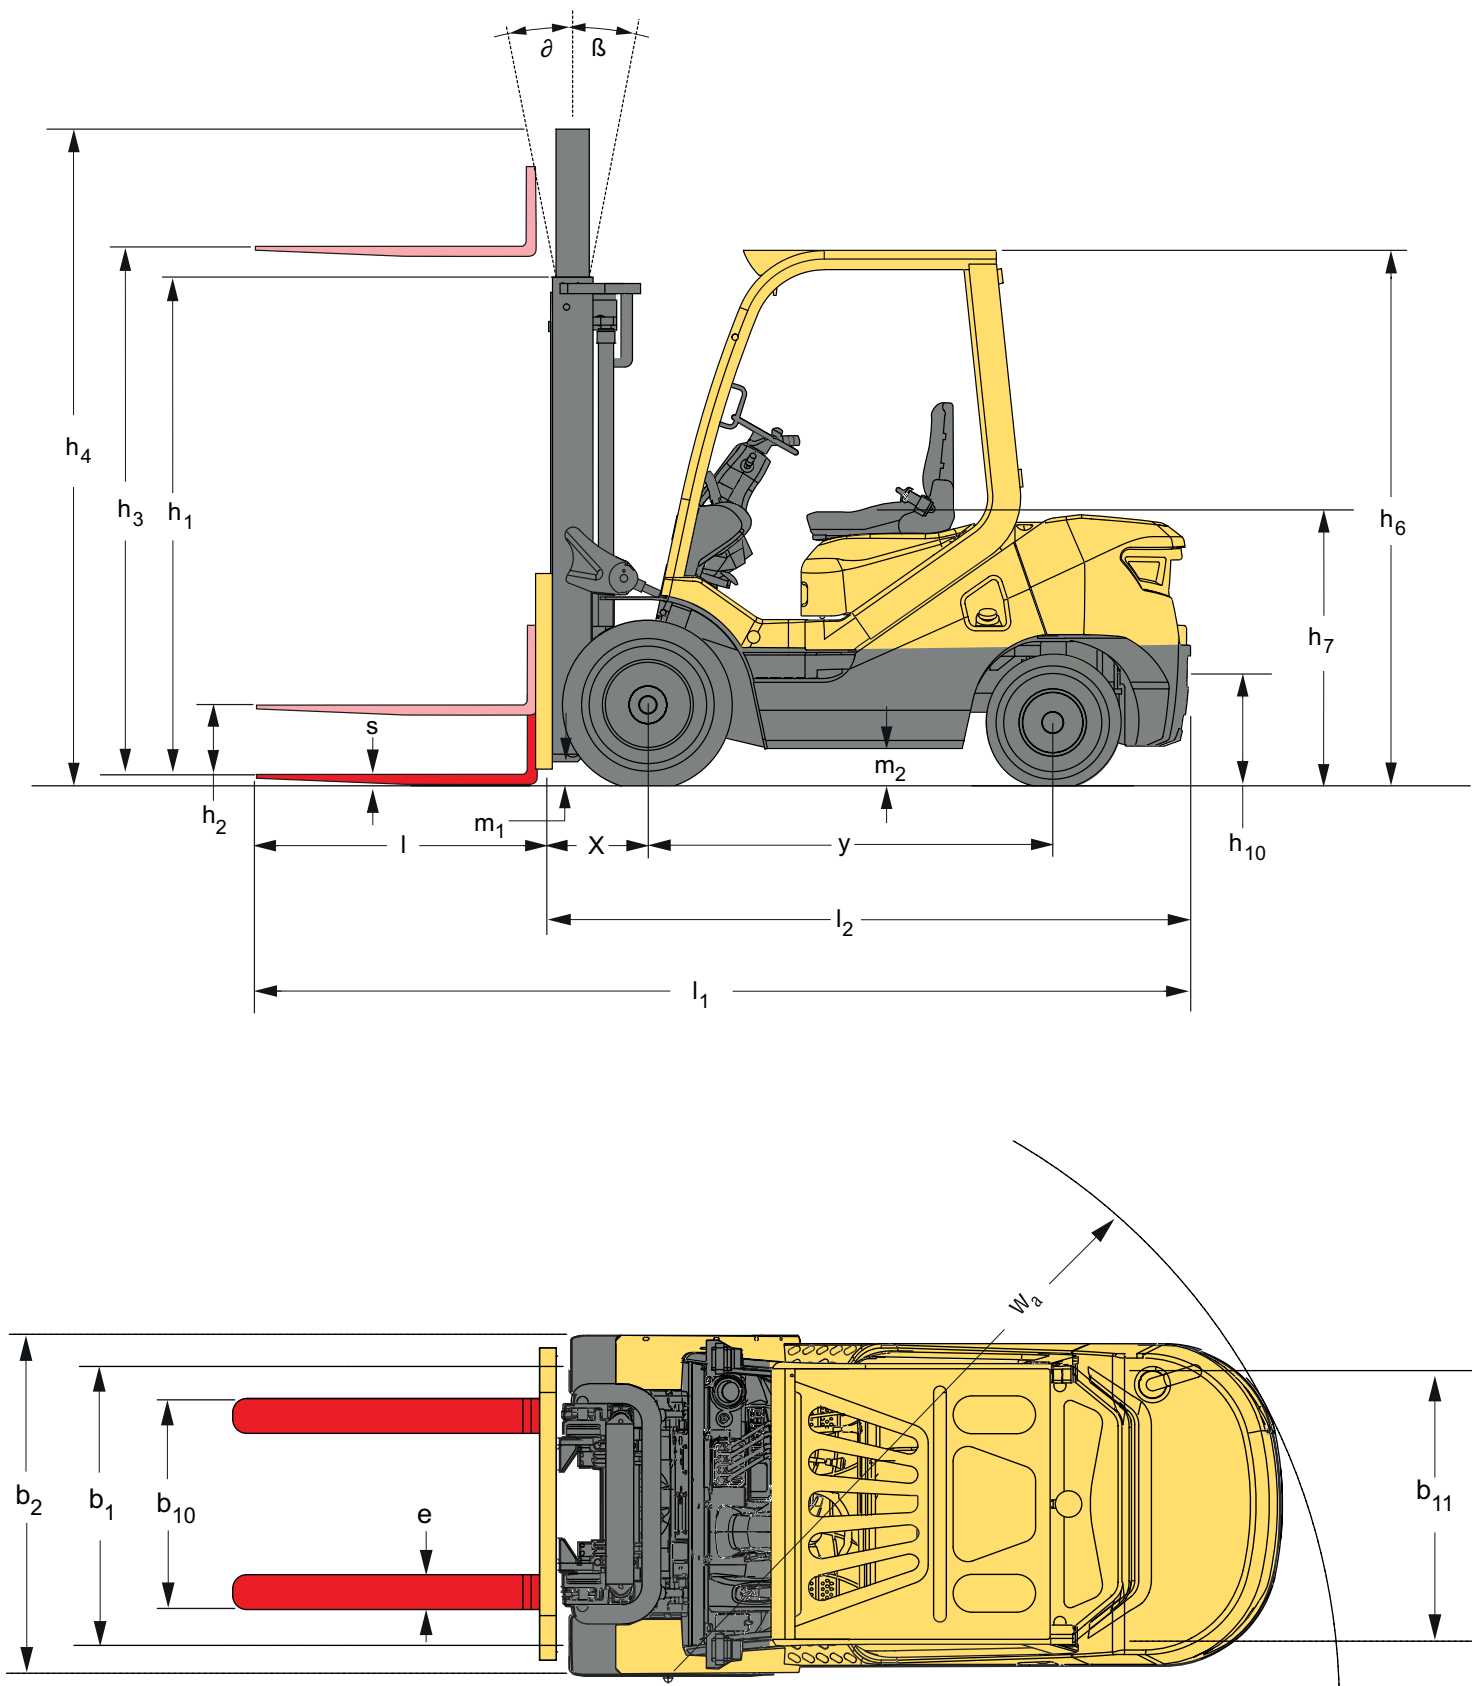

H2.OUT | H2.5UT SPECIFICATIONS

DISTINGUISHING MARK	1.1	HYSTER				HYSTER					
	1.2	H2.OUT				H2.5UT					
WEIGHT	1.2.1	Engine/transmission	Yanmar 2.6L	LS 2.5L	Xinchai 2.67L	GCT K25	Yanmar 2.6L	LS 2.5L	Xinchai 2.67L	GCT K25	
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	DIESEL			LPG / PETROL		DIESEL			LPG / PETROL
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker	Seated				Seated				
	1.5	Rated capacity/rated load	Q (kg)	2000				2500			
	1.6	Load center distance	c (mm)	500				500			
	1.8	Load distance, centre of drive axle to fork	x (mm)	465				465			
	1.9	Wheelbase	y (mm)	1600				1600			
	2.1	Service weight	kg	3550				3800			
	2.2	Axle loading, laden front/rear	kg	4780/750				5510 / 780			
TYRES, CHASSIS	2.3	Axle loading, unladen front/rear	kg	1480/2050				1380 / 2410			
	3.1	Tyre type	Pneumatic				Pneumatic				
	3.2	Tyre size, front	7.00-12-12PR				7.00-12-12PR				
	3.3	Tyre size, rear	6.00-9-10PR				6.00-9-10PR				
	3.5	Wheels, number front/rear (X=drive wheels)	2X / 2				2X / 2				
	3.6	Tread, front	b10 (mm)	970				970			
	3.7	Tread, rear	b11 (mm)	980				980			
DIMENSIONS	4.1	Tilt of mast/fork carriage forward/backward	α / β (°)	6 / 12				6 / 12			
	4.2	Height, mast lowered	h1 (mm)	2010				2010			
	4.3	Freelift	h2 (mm)	160				160			
	4.4	Lift	h3 (mm)	3000				3000			
	4.5.1	Height of mast, extended w/o LBR	h4 (mm)	3575				3575			
	4.5.2	Height of mast, extended w/ LBR	h4 (mm)	3990				3990			
	4.7	Height of overhead guard	h6 (mm)	2180				2180			
	4.8	Seat height/stand height	h7 (mm)	1167				1167			
	4.12	Coupling height	h10 (mm)	250				250			
	4.19	Overall length	l1 (mm)	3630				3690			
	4.20	Length to face of forks	l2 (mm)	2560				2620			
	4.21	Overall width (standard/dual)	b1/b2 (mm)	1150 / 1590				1150 / 1590			
	4.22	Fork dimensions	s/e/l (mm)	40 x 122 x 1070				40 x 122 x 1070			
	4.23	Fork carriage to DIN 15173, Class A/B	II A				II A				
	4.24	Fork carriage width	b3 (mm)	1040				1040			
	4.31	Ground clearance, laden, below mast	m1 (mm)	125				125			
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	150				150			
	4.34.1	Aisle width with pallets 1000 long x 1200 wide	Ast (mm)	3966				4026			
	4.34.2	Aisle width with pallets 800 wide x 1200 long	Ast (mm)	3766				3826			
	4.35	Turning radius	Wa (mm)	2290				2350			
	4.36	Internal turning radius	b13 (mm)	745				745			
4.42	Step height (from ground to running board)	k (mm)	430				430				
PERFORMANCE DATA	5.1	Travel speed, laden/unladen	km/h	19 / 19	18 / 18	20 / 20	19 / 19	19 / 19	18 / 18	19 / 20	19 / 19
	5.2	Lifting speed, laden/unladen	m/s	0.54 / 0.57	0.50 / 0.53	0.54 / 0.57	0.50 / 0.53	0.56 / 0.61	0.50 / 0.53	0.56 / 0.59	0.42 / 0.54
	5.3	Lowering speed, laden/unladen	m/s	0.43 / 0.40				0.45 / 0.41	0.43 / 0.40	0.45 / 0.42	0.45 / 0.41
	5.5	Maximum drawbar pull with/without load	N	12774 / 8761	25400 / 15500	18400 / 10400	16651 / 8761	12648 / 8450	25400 / 15500	18100 / 15000	16790 / 8450
	5.6.1	Drawbar pull, with/without load @ 1.6 km/h	N	12500 / 10500	21400 / 15000	15640 / 13140	15000 / 12000	13500 / 10500	21400 / 15000	15640 / 11640	16000 / 12000
	5.6.1	Drawbar pull with/without load @ 4.8 km/h	N	8879 / 7544	16300 / 14000	11700 / 10200	7544 / 6872	8879 / 7185	16300 / 14000	11960 / 9960	7185 / 6872
	5.7.1	Gradeability, with/without load, @ 1.6 km/h	%	20 / 25	22 / 26	24 / 26	25 / 25	22 / 25	22 / 26	25 / 25	
	5.7.2	Gradeability, with/without load @ 4.8 km/h	%	18 / 22	20 / 25	20 / 25	13 / 22	15 / 19	20 / 25	18 / 25	11 / 19
5.10	Service brake	Hydraulic				Hydraulic					
COMBUSTION-ENGINE	7.1	Engine	Yanmar 2.6L	L4CRV-T6	Xinchai 2.67L	GCT K25	Yanmar 2.6L	L4CRV-T6	Xinchai 2.67L	GCT K25	
	7.2	Engine power according to ISO 1585	kW	33	42	36.8	37.4	33	42	36.8	37.4
	7.3	Rated speed	min-1	2450	2300	2500	2300	2450	2300	2500	2300
	7.4	Number of cylinders	4				4				
	7.4	Cylinder displacement	cm3	2659	2505	2674	2488	2659	2505	2674	2488
7.5	Fuel consumption according to VDI cycle	l/h or kg/h	3.7		2.9	3.7	3.64	3.8	3.32	4.96	
ADDITIONAL	8.1	Type of drive	Automatic				Automatic				
	10.1	Operating pressure of attachments	bar	0-175				0-175			
	10.2	Oil volume for attachments	l/min	64	65	64		64			
	10.3	Hydraulic oil tank capacity - initial fill	l	60				60			
	10.4.2	Fuel tank capacity	l	60				60			
	10.7.1	Sound pressure at driver's ear OHG	dB(A)	84				84.7	84		
	10.7.3	Guaranteed sound power 2001/14/EC	dB(A)	104		103		104		103	
	10.8	Towing coupling type	PIN				PIN				

Note: Specification data is based on VDI 2198, with the following configuration: Complete truck with 2 STG LFL 3000 mm mast, standard carriage and 1070mm forks, overhead guard and standard pneumatic drive and steer tyres.

H3.OUT | H3.5UT SPECIFICATIONS

DISTINGUISHING MARK	HYSTER H3.OUT				HYSTER H3.5UT						
	1.1	1.2	1.2.1	1.3	1.4	1.5	1.6	1.8	1.9		
WEIGHT	1.1	Manufacturer (abbreviation)	HYSTER				HYSTER				
	1.2	Model designation	H3.OUT				H3.5UT				
	1.2.1	Engine/transmission	Yanmar 3.3L	LS 2.5L	Xinchai 2.67L	GCT K25	Yanmar 3.3L	LS 2.5L	Xinchai 2.67L	GCT K25	
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	DIESEL		LPG / PETROL		DIESEL		LPG / PETROL		
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker	Seated				Seated				
	1.5	Rated capacity/rated load	Q (kg)	3000				3500			
	1.6	Load center distance	c (mm)	500				500			
	1.8	Load distance, centre of drive axle to fork	x (mm)	490				510			
	1.9	Wheelbase	y (mm)	1700				1700			
	2.1	Service weight	kg	4300				4710			
2.2	Axle loading, laden front/rear	kg	6490 / 790				7250 / 960				
2.3	Axle loading, unladen front/rear	kg	1690 / 2590				1690 / 3020				
TYRES, CHASSIS	3.1	Tyre type	Pneumatic				Pneumatic				
	3.2	Tyre size, front	28x9-15-14PR				28x9-15-14PR				
	3.3	Tyre size, rear	6.50-10-10PR				6.50-10-10PR				
	3.5	Wheels, number front/rear (X=drive wheels)	2X / 2				2X / 2				
	3.6	Tread, front	b10 (mm)	1000				1000			
	3.7	Tread, rear	b11 (mm)	970				970			
	DIMENSIONS	4.1	Tilt of mast/fork carriage forward/backward	α / β (°)	6 / 12				6 / 12		
4.2		Height, mast lowered	h1 (mm)	2075				2150			
4.3		Freelift	h2 (mm)	165				170			
4.4		Lift	h3 (mm)	3000				3000			
4.5.1		Height of mast, extended w/o LBR	h4 (mm)	3640				3700			
4.5.2		Height of mast, extended w/ LBR	h4 (mm)	4100				4100			
4.7		Height of overhead guard	h6 (mm)	2205				2205			
4.8		Seat height/stand height	h7 (mm)	1192				1192			
4.12		Coupling height	h10 (mm)	260				260			
4.19		Overall length	l1 (mm)	3765				3850			
4.20		Length to face of forks	l2 (mm)	2695				2780			
4.21		Overall width (standard/dual)	b1/b2 (mm)	1210 / 1650				1210 / 1650			
4.22		Fork dimensions	s/e/l (mm)	45 x122 x1070				45 x122 x1070			
4.23		Fork carriage to DIN 15173, Class A/B		III A				III A			
4.24		Fork carriage width	b3 (mm)	1100				1100			
4.31		Ground clearance, laden, below mast	m1 (mm)	140				140			
4.32		Ground clearance, centre of wheelbase	m2 (mm)	145				145			
4.34.1		Aisle width with pallets 1000 long x 1200 wide	Ast (mm)	4126				4210			
4.34.2		Aisle width with pallets 800 wide x 1200 long	Ast (mm)	3926				4010			
4.35		Turning radius	Wa (mm)	2430				2500			
4.36	Internal turning radius	b13 (mm)	830				830				
4.42	Step height (from ground to running board)	k (mm)	455				455				
PERFORMANCE DATA	5.1	Travel speed, laden/unladen	km/h	19 / 20	18 / 18	18 / 19	18 / 19	19 / 20	18 / 18	19 / 20	18 / 19
	5.2	Lifting speed, laden/unladen	m/s	0.42 / 0.45	0.39 / 0.42	0.42 / 0.45	0.40 / 0.43	0.38 / 0.40	0.38 / 0.41	0.34 / 0.36	0.33 / 0.36
	5.3	Lowering speed, laden/unladen	m/s	0.40 / 0.38	0.38 / 0.37	0.43 / 0.40	0.40 / 0.38	0.45 / 0.38	0.38 / 0.37	0.45 / 0.38	
	5.5	Maximum drawbar pull with/without load	N	20596 / 14800	24100 / 18000	17000 / 12000	17480 / 11980	17739 / 9870	24100 / 17500	16560 / 10060	16679 / 9870
	5.6.1	Drawbar pull, with/without load @ 1.6 km/h	N	17500 / 14000	20400 / 14000	15766 / 12766	15000 / 13000	16500 / 13000	20400 / 15000	15209 / 12709	14000 / 12000
	5.6.1	Drawbar pull with/without load @ 4.8 km/h	N	8119 / 7319	15500 / 11000	11766 / 8766	11500 / 8000	8968 / 8892	15500 / 9500	11684 / 9684	6906 / 8892
	5.7.1	Gradeability, with/without load, @ 1.6 km/h	%	24 / 25	20 / 25	19 / 25	20 / 25	19 / 25	20 / 24	16.5 / 24	17 / 25
	5.7.2	Gradeability, with/without load @ 4.8 km/h	%	12 / 19	19.5 / 24	14 / 19	13 / 19	13 / 19	17 / 21	12 / 16.50	10 / 19
	5.10	Service brake		Hydraulic				Hydraulic			
	COMBUSTION-ENGINE	7.1	Engine	Yanmar 3.3L	L4CRV-T6	Xinchai 2.67L	GCT K25	Yanmar 3.3L	L4CRV-T6	Xinchai 2.67L	GCT K25
7.2		Engine power according to ISO 1585	kW	42.1	42	36.8	37.4	42.1	42	36.8	37.4
7.3		Rated speed	min-1	2300		2500	2300	2300		2500	2300
7.4		Number of cylinders		4				4			
7.4		Cylinder displacement	cm3	3319	2505	2764	2488	3319	2505	2764	2488
7.5	Fuel consumption according to VDI cycle	l/h or kg/h	4.06	4.0	3.6	3.5	4.9	4.2	4.0	4.3	
OTHER	8.1	Type of drive	Automatic				Automatic				
	10.1	Operating pressure of attachments	bar	0-175				0-175	0-195	0-175	
	10.2	Oil volume for attachments	ℓ/min	64				64			
	10.3	Hydraulic oil tank capacity - initial fill	ℓ	70				70			
	10.4.2	Fuel tank capacity	ℓ	70				70			
	10.7.1	Sound pressure at driver's ear OHG	dB(A)	84				88.5	84	81.7	
	10.7.3	Guaranteed sound power 2001/14/EC	dB(A)	104		103		104		103	
	10.8	Towing coupling type		PIN				PIN			

Note: Specification data is based on VDI 2198, with the following configuration: Complete truck with 2 STG LFL 3000 mm mast, standard carriage and 1070mm forks, overhead guard and standard pneumatic drive and steer tyres.

MAST AND CAPACITY INFORMATION

H2.OUT RATED CAPACITY KG @ 500 MM AND 600 MM LOAD CENTRE

	Maximum fork height h ₃ + s (mm)	Mast tilt		Lowered height h ₁ (mm)	Extended height h ₄ (mm) (1)	Extended height h ₄ (mm) (2)	Free lift height h ₂ + s (mm)		H2.OUT without sideshift			
		FWD tilt (°)	Back tilt (°)				Without LBR (mm)	With LBR (mm)	Solid tyres		Pneumatic tyres	
									500 mm LC	600 mm LC	500 mm LC	600 mm LC
2-stage limited free lift	3000	6	12	2010	3575	3990	160	160	2000	1800	2000	1800
	4000	6	6	2560	4575	4990	160	160	2000	1800	2000	1800
	4500	6	6	2810	5075	5490	160	160	1900	1710	1850	1710
	5000	6	6	3060	5575	5990	160	160	1800	1620	1590	1550
	5500	3	6	3360	6075	6490	160	160	1690	1520	1150	1130
6000	3	6	3610	6575	6990	160	160	1520	1400	870	860	
2 STG FFL	3000	6	12	2010	3590	3990	1420	1020	2000	1800	2000	1800
3-stage full free lift	4500	6	6	2060	5017	5490	1440	1070	1900	1730	1830	1730
	4800	6	6	2160	5317	5790	1540	1170	1840	1670	1710	1660
	5500	3	6	2425	6017	6490	1800	1430	1670	1510	1110	1110
	6000	3	6	2610	6517	6990	1990	1620	1430	1390	850	850
	6500	3	6	2825	7017	7490	2215	1835	1170	1170	610	610

H2.5UT RATED CAPACITY KG @ 500 MM AND 600 MM LOAD CENTRE

	Maximum fork height h ₃ + s (mm)	Mast tilt		Lowered height h ₁ (mm)	Extended height h ₄ (mm) (1)	Extended height h ₄ (mm) (2)	Free lift height h ₂ + s (mm)		H2.5UT without sideshift			
		FWD tilt (°)	Back tilt (°)				Without LBR (mm)	With LBR (mm)	Solid tyres		Pneumatic tyres	
									500 mm LC	600 mm LC	500 mm LC	600 mm LC
2-stage limited free lift	3000	6	12	2010	3575	3990	160	160	2500	2300	2500	2300
	4000	6	6	2560	4575	4990	160	160	2500	2300	2500	2300
	4500	6	6	2810	5075	5490	160	160	2390	2200	2080	2010
	5000	6	6	3060	5575	5990	160	160	2270	2090	1810	1760
	5500	3	6	3360	6075	6490	160	160	1860	1840	1350	1320
6000	3	6	3610	6575	6990	160	160	1500	1480	1040	1030	
2 STG FFL	3000	6	12	2010	3590	3990	1420	1020	2500	2300	2500	2300
3-stage full free lift	4500	6	6	2060	5017	5490	1440	1070	2340	2120	2020	1990
	4800	6	6	2160	5317	5790	1540	1170	2270	2060	1890	1870
	5500	3	6	2425	6017	6490	1800	1430	1710	1710	1280	1280
	6000	3	6	2610	6517	6990	1990	1620	1410	1410	1010	1010
	6500	3	6	2825	7017	7490	2215	1835	1120	1150	740	740

H3.OUT RATED CAPACITY KG @ 500 MM AND 600 MM LOAD CENTRE

	Maximum fork height h ₃ + s (mm)	Mast tilt		Lowered height h ₁ (mm)	Extended height h ₄ (mm) (1)	Extended height h ₄ (mm) (2)	Free lift height h ₂ + s (mm)		H3.OUT without sideshift			
		FWD tilt (°)	Back tilt (°)				Without LBR (mm)	With LBR (mm)	Solid tyres		Pneumatic tyres	
									500 mm LC	600 mm LC	500 mm LC	600 mm LC
2-stage limited free lift	3000	6	12	2075	3640	4100	165	165	3000	2910	3000	2910
	4000	6	6	2625	4640	5100	165	165	3000	2850	3000	2780
	4500	6	6	2875	5140	5600	165	165	2860	2660	2750	2580
	5000	6	6	3125	5640	6100	165	165	2760	2570	2420	2350
	5500	3	6	3425	6140	6600	165	165	2340	2290	1920	1870
6000	3	6	3675	6640	7100	165	165	1800	1760	1380	1360	
2 STG FFL	3000	6	12	2075	3650	4100	1425	975	3000	2900	3000	2900
3-stage full free lift	4500	6	6	2125	5100	5600	1525	1025	2790	2540	2680	2540
	4800	6	6	2225	5400	5900	1625	1125	2720	2470	2610	2470
	5500	3	6	2490	6100	6600	1880	1380	2190	2190	1860	1860
	6000	3	6	2675	6600	7100	2075	1575	1630	1630	1280	1280
	6500	3	6	2890	7100	7600	2260	1790	1220	1220	820	820

H3.5UT RATED CAPACITY KG @ 500 MM AND 600 MM LOAD CENTRE

	Maximum fork height h ₃ + s (mm)	Mast tilt		Lowered height h ₁ (mm)	Extended height h ₄ (mm) (1)	Extended height h ₄ (mm) (2)	Free lift height h ₂ + s (mm)		H3.5UT without sideshift			
		FWD tilt (°)	Back tilt (°)				Without LBR (mm)	With LBR (mm)	Solid tyres		Pneumatic tyres	
									500 mm LC	600 mm LC	500 mm LC	600 mm LC
2-stage limited free lift	3000	6	12	2150	3700	4100	170	170	3500	3450	3500	3450
	4000	6	6	2700	4700	5100	170	170	3500	3320	3310	3080
	4500	6	6	2950	5200	5600	170	170	3380	3210	2960	2780
	5000	6	6	3200	5700	6100	170	170	2980	2810	2470	2320
	5500	3	6	3500	6200	6600	170	170	2430	2290	1950	1840
6000	3	6	3750	6700	7100	170	170	1980	1870	1520	1440	
2 STG FFL	3000	6	12	2150	3680	4100	1470	1050	3500	3440	3500	3440
3-stage full free lift	4500	6	6	2200	5140	5600	1560	1100	3270	2970	2870	2810
	4800	6	6	2300	5440	5900	1660	1200	3090	2900	2630	2590
	5500	3	6	2565	6140	6600	1915	1455	2350	2310	1920	1880
	6000	3	6	2750	6640	7100	2110	1650	1880	1860	1450	1430
	6500	3	6	2965	7100	7600	2290	1830	1410	1400	920	920

Note: For integral sideshift deduct 50 Kg from stated capacity, (1) = without LBR (2) with LBR, all ratings with 1070 mm forks, dual tyre capacities available upon request.

HYSTER® DEALERS



HYSTER PACIFIC

1/23 Rowood Road, Prospect NSW 2148
Tel: +61 (2) 9795 3800 Fax: +61 (2) 9792 8484

HYSTER ASIA

16 Tuas Avenue 20, Singapore 638827
Tel: +65 6863 3387 Fax: +65 6863 3349

   @hysterasiapacific