


H2.0-3.5A




DIESEL AND LPG FORKLIFT TRUCKS PRODUCT TECHNICAL GUIDE



TRUCK DIMENSIONS

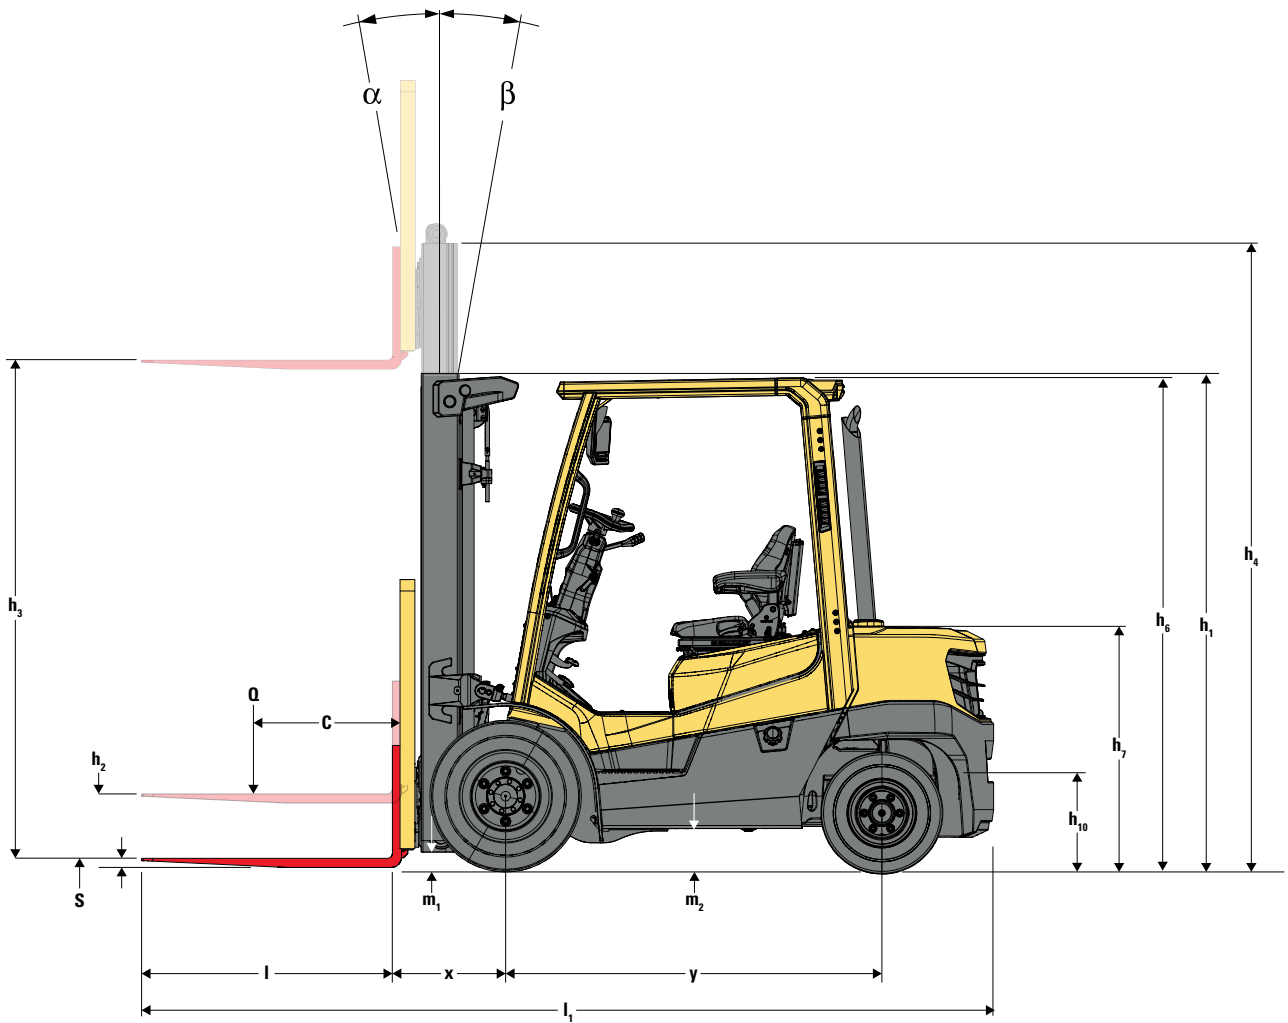

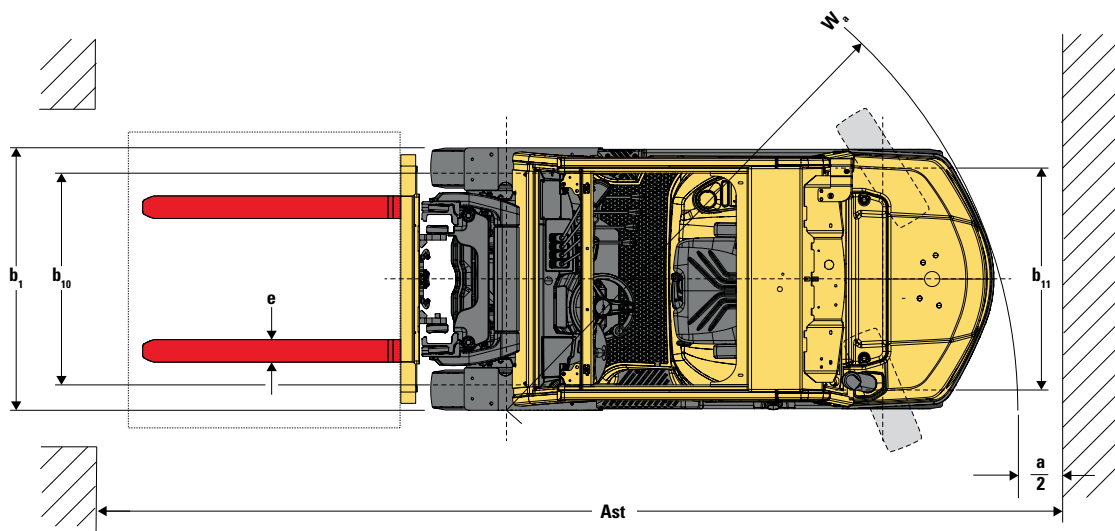

H2.0A DIESEL/LPG SPECIFICATIONS WITH MECHANICAL TRANSMISSION

			HYSTER					
			H2.0A					
GENERAL	1-1	Manufacturer			HYSTER			
	1-2	Model designation			H2.0A			
	1-2-1	Engine		Yanmar 2.1L	Yanmar 3.0L	Yanmar 2.2L		
	1-2-2	CE compliance / Emission standards		Stage V	Non-Certified	Non-Certified & Stage V		
	1-2-3	Transmission		Mechanical Powershift				
	1-2-4	Brake Type		Drum Brakes				
	1-3	Drive: electric (battery or mains), diesel, petrol, LPG		Diesel		LPG		
	1-4	Operator type: hand, pedestrian, standing, seated, order-picker		Seated				
	1-5	Rated capacity/rated load	Q	t	2.0			
	1-6	Load centre distance	c	mm	500			
1-8	Load distance, centre of drive axle to fork	x	mm	475				
1-9	Wheelbase	y	mm	1650				
WEIGHT	2-1	Service weight		kg	3480			
	2-2	Axle loading laden, front/rear		kg	4815 / 665			
	2-3	Axle loading unladen, front/rear		kg	1630 / 1850			
WHEELS	3-1	Tyres, front/rear			Super Elastic			
	3-2	Tyre size, front			7.00 X 12			
	3-3	Tyre size, rear			6.00 X 9			
	3-5	Number of wheels, front/rear (X = driven)			2x / 2			
	3-6	Tread, front	b10	mm	976			
	3-7	Tread, rear	b11	mm	980			
	DIMENSIONS	4-1	Tilt of mast / fork carriage forward / backward	α / β	($^{\circ}$)	6 / 6		
4-2		Height, mast lowered	h1	mm	2010			
4-3		Free lift ⁽¹⁾	h2	mm	160			
4-4		Lift ⁽¹⁾	h3	mm	3000			
4-5		Height, mast extended ⁽²⁾	h4	mm	3575			
4-7		Height of overhead guard	h6	mm	2150			
4-8		Seat height relating to SIP/stand height ⁽³⁾	h7	mm	1143			
4-12		Coupling height	h10	mm	420			
4-19		Overall length	l1	mm	3605			
4-20		Length to face of forks	l2	mm	2535			
4-21		Overall width (single / wide / dual)	b1	mm	1205 / 1590			
4-22		Fork dimensions DIN ISO 2331	s/e/l	mm	40 X 122 X 1070			
4-23		Fork carriage ISO 2328, class/type A, B			II A			
4-24		Fork carriage width ⁽⁴⁾	b3	mm	1040			
4-31		Ground clearance, laden, below mast	m1	mm	115			
4-32		Ground clearance, centre of wheelbase	m2	mm	178			
4-34-1		Aisle width for pallets 1000 x 1200 crossways	Ast	mm	3960			
4-34-2		Aisle width for pallets 800 x 1200 lengthways	Ast	mm	3760			
4-35		Turning radius	Wa	mm	2285			
4-36		Internal turning radius	b13	mm	815			
4-41		90° intersecting aisle (with pallet W = 1200mm, L = 1000mm)			2052			
4-42		Step height (from ground to running board)		mm	440			
4-43	Step height (between intermediate steps between running board and floor)		mm	250				
PERFORMANCE	5-1	Travel speed, laden/unladen		km/h	18.0 / 19.0	18.0 / 18.0	18.0 / 19.0	
	5-1-1	Travel speed, laden/unladen, backwards		km/h	18.0 / 19.0	18.0 / 18.0	18.0 / 19.0	
	5-2	Lift speed, laden/unladen ⁽⁵⁾		m/s	0.51 / 0.54			
	5-3	Lowering speed, laden/unladen		m/s	0.43 / 0.40	0.43 / 0.40	0.43 / 0.40	
	5-5	Drawbar pull, laden ⁽⁶⁾		N	17000	16500	18500	
	5-7	Gradeability, laden/unladen ⁽⁷⁾		%	22 / 26		25 / 26	
	5-9	Acceleration time, laden/unladen (to 15m)		s	4.4 / 4.0		4.5 / 4.0	
	5-10	Service brake			Hydraulic			
	COMBUSTION ENGINE	7-1	Engine manufacturer / type			Yanmar / 4TNV86CT	Yanmar / 4TNE94L	Yanmar / 4TN88G/GN
		7-2	Engine power according to ISO 1585		Kw	34.6	35.5	41.7
7-3		Rated speed		min-1	2500	2400	2500	
7-3-1		Torque at 1 / min		(N-m/min)	167 / 1625	162 / 1500	174 / 1690	
7-4		Number of cylinders/displacement		(-) / (cm ³)	4 / 2091	4 / 3053	4 / 2190	
7-5		Fuel consumption according to VDI 2198		ℓ/h or kg/h	2.6	3.0	2.6	
7-5-1		Fuel consumption according to VDI EN16796		ℓ/h or kg/h	NA			
7-6	Turnover output (Power / ECO)		(1 / h)	72		80		
ADDITIONAL DATA	8-1	Type of drive unit			Automatic			
	10-1	Operating pressure for attachments		bar	175			
	10-2	Oil volume for attachments ⁽⁸⁾		l/min	64			
	10-3	Hydraulic oil tank, capacity		l	42		52	
	10-4	Fuel tank, capacity		l	42		-	
	10-7	Sound pressure level at the driver's seat ⁽⁹⁾		dB (A)	82			
	10-7-1	Guaranteed sound power 2001 / 14 / EC		dB (A)	NA			
	10-8	Towing coupling type			Pin			

H2.5A DIESEL/LPG SPECIFICATIONS WITH MECHANICAL TRANSMISSION

			HYSTER				
			H2.5A				
GENERAL	1-1	Manufacturer			HYSTER		
	1-2	Model designation			H2.5A		
	1-2-1	Engine		Yanmar 2.1L	Yanmar 3.0L	Yanmar 2.2L	
	1-2-2	CE compliance / Emission standards		Stage V	Non-Certified	Non-Certified & Stage V	
	1-2-3	Transmission		Mechanical Powershift			
	1-2-4	Brake Type		Drum Brakes			
	1-3	Drive		Diesel		LPG	
	1-4	Operator type		Seated			
	1-5	Rated capacity/rated load	Q	t	2.5		
	1-6	Load centre distance	c	mm	500		
	1-8	Load distance, centre of drive axle to fork	x	mm	475		
	1-9	Wheelbase	y	mm	1650		
	WEIGHT	2-1	Service weight			3865	
		2-2	Axle loading laden, front/rear			5593 / 772	
2-3		Axle loading unladen, front/rear			1615 / 2250		
WHEELS	3-1	Tyres, front/rear			Super Elastic		
	3-2	Tyre size, front			7.00 X 12		
	3-3	Tyre size, rear			6.00 X 9		
	3-5	Number of wheels, front/rear (X = driven)			2x / 2		
	3-6	Tread, front	b ₁₀	mm	976		
	3-7	Tread, rear	b ₁₁	mm	980		
	DIMENSIONS	4-1	Tilt of mast / fork carriage forward / backward	α / β	(^o)	6 / 6	
4-2		Height, mast lowered	h ₁	mm	2010		
4-3		Free lift ⁽¹⁾	h ₂	mm	160		
4-4		Lift ⁽¹⁾	h ₃	mm	3000		
4-5		Height, mast extended ⁽²⁾	h ₄	mm	3575		
4-7		Height of overhead guard	h ₆	mm	2150		
4-8		Seat height relating to SIP/stand height ⁽³⁾	h ₇	mm	1143		
4-12		Coupling height	h ₁₀	mm	420		
4-19		Overall length	l ₁	mm	3685		
4-20		Length to face of forks	l ₂	mm	2615		
4-21		Overall width (single / wide / dual)	b ₁	mm	1205 / 1590		
4-22		Fork dimensions DIN ISO 2331	s/e/l	mm	40 X 122 X 1070		
4-23		Fork carriage ISO 2328, class/type A, B			II A		
4-24		Fork carriage width ⁽⁴⁾	b ₃	mm	1040		
4-31		Ground clearance, laden, below mast	m ₁	mm	115		
4-32		Ground clearance, centre of wheelbase	m ₂	mm	178		
4-34-1		Aisle width for pallets 1000 x 1200 crossways	A _{st}	mm	4032		
4-34-2		Aisle width for pallets 800 x 1200 lengthways	A _{st}	mm	3832		
4-35		Turning radius	W _a	mm	2357		
4-36		Internal turning radius	b ₁₃	mm	815		
4-41		90° intersecting aisle (with pallet W = 1200mm, L = 1000mm)			2062		
4-42		Step height (from ground to running board)		mm	440		
4-43	Step height (between intermediate steps between running board and floor)		mm	250			
PERFORMANCE	5-1	Travel speed, laden/unladen		18.0 / 19.0	18.0 / 18.0	18.0 / 19.0	
	5-1-1	Travel speed, laden/unladen, backwards		18.0 / 19.0	18.0 / 18.0	18.0 / 19.0	
	5-2	Lift speed, laden/unladen ⁽⁵⁾			0.51 / 0.54		
	5-3	Lowering speed, laden/unladen		0.45 / 0.41	0.45 / 0.42	0.45 / 0.41	
	5-5	Drawbar pull, laden ⁽⁶⁾		19000	18500	20000	
	5-7	Gradeability, laden/unladen ⁽⁷⁾			20 / 24	24 / 25	
	5-9	Acceleration time, laden/unladen (to 15m)		4.3 / 4.1	4.5 / 4.1	4.6 / 4.1	
	5-10	Service brake			Hydraulic		
	COMBUSTION ENGINE	7-1	Engine manufacturer / type		Yanmar / 4TNV86CT	Yanmar / 4TNE94L	Yanmar / 4TN88G/GN
		7-2	Engine power according to ISO 1585	Kw	34.6	35.5	41.7
7-3		Rated speed	min-1	2500	2400	2500	
7-3-1		Torque at 1 / min	(N-m/min)	167 / 1625	162 / 1500	174 / 1690	
7-4		Number of cylinders/displacement	(-) / (cm ³)	4 / 2091	4 / 3053	4 / 2190	
7-5		Fuel consumption according to VDI 2198	ℓ/h or kg/h	2.8	3.3	2.8	
7-5-1		Fuel consumption according to VDI EN16796	ℓ/h or kg/h		NA		
7-6		Turnover output (Power / ECO)	(1 / h)		70	78	
ADDITIONAL DATA	8-1	Type of drive unit		Automatic			
	10-1	Operating pressure for attachments	bar	175			
	10-2	Oil volume for attachments ⁽⁸⁾	l/min	64			
	10-3	Hydraulic oil tank, capacity	l	42		52	
	10-4	Fuel tank, capacity	l	42		-	
	10-7	Sound pressure level at the driver's seat ⁽⁹⁾	dB (A)	82			
	10-7-1	Guaranteed sound power 2001 / 14 / EC	dB (A)	NA			
	10-8	Towing coupling type		Pin			

H3.0A DIESEL/LPG SPECIFICATIONS WITH MECHANICAL TRANSMISSION

			HYSTER					
			H3.0A					
GENERAL	1-1	Manufacturer				HYSTER		
	1-2	Model designation				H3.0A		
	1-2-1	Engine			Yanmar 2.1L	Yanmar 3.3L	Yanmar 2.2L	
	1-2-2	CE compliance / Emission standards			Stage V	Non-Certified	Non-Certified & Stage V	
	1-2-3	Transmission			Mechanical Powershift			
	1-2-4	Brake Type			Drum Brakes			
	1-3	Drive			Diesel		LPG	
	1-4	Operator type			Seated			
	1-5	Rated capacity/rated load	Q	t	3			
	1-6	Load centre distance	c	mm	500			
	1-8	Load distance, centre of drive axle to fork	x	mm	495			
	1-9	Wheelbase	y	mm	1700			
	WEIGHT	2-1	Service weight				4455	
2-2		Axle loading laden, front/rear				6545 / 910		
2-3		Axle loading unladen, front/rear				1795 / 2650		
WHEELS	3-1	Tyres, front/rear				Super Elastic		
	3-2	Tyre size, front				28 X 9 - 15		
	3-3	Tyre size, rear				6.5 X 10		
	3-5	Number of wheels, front/rear (X = driven)				2x / 2		
	3-6	Tread, front	b ₁₀	mm	1004			
	3-7	Tread, rear	b ₁₁	mm	982			
	DIMENSIONS	4-1	Tilt of mast / fork carriage forward / backward	α / β	($^{\circ}$)	6 / 6		
4-2		Height, mast lowered	h ₁	mm	2075			
4-3		Free lift ⁽¹⁾	h ₂	mm	165			
4-4		Lift ⁽¹⁾	h ₃	mm	3000			
4-5		Height, mast extended ⁽²⁾	h ₄	mm	3640			
4-7		Height of overhead guard	h ₆	mm	2175			
4-8		Seat height relating to SIP/stand height ⁽³⁾	h ₇	mm	1168			
4-12		Coupling height	h ₁₀	mm	445			
4-19		Overall length	l ₁	mm	3800			
4-20		Length to face of forks	l ₂	mm	2730			
4-21		Overall width (single / wide / dual)	b ₁	mm	1232 / 1730			
4-22		Fork dimensions DIN ISO 2331	s/e/l	mm	45 X 122 X 1070			
4-23		Fork carriage ISO 2328, class/type A, B			III A			
4-24		Fork carriage width ⁽⁴⁾	b ₃	mm	1100			
4-31		Ground clearance, laden, below mast	m ₁	mm	130			
4-32		Ground clearance, centre of wheelbase	m ₂	mm	203			
4-34-1		Aisle width for pallets 1000 x 1200 crossways	A _{st}	mm	4151			
4-34-2		Aisle width for pallets 800 x 1200 lengthways	A _{st}	mm	3951			
4-35		Turning radius	W _a	mm	2461			
4-36		Internal turning radius	b ₁₃	mm	825			
4-41		90° intersecting aisle (with pallet W = 1200mm, L = 1000mm)			2127			
4-42		Step height (from ground to running board)		mm	462			
4-43		Step height (between intermediate steps between running board and floor)		mm	250			
PERFORMANCE	5-1	Travel speed, laden/unladen			19.0 / 20.0	18.0 / 19.0	19.0 / 20.0	
	5-1-1	Travel speed, laden/unladen, backwards			19.0 / 20.0	18.0 / 19.0	19.0 / 20.0	
	5-2	Lift speed, laden/unladen ⁽⁵⁾				0.40 / 0.43		
	5-3	Lowering speed, laden/unladen			0.40 / 0.38		0.45 / 0.38	
	5-5	Drawbar pull, laden ⁽⁶⁾		N	19000		18000	
	5-7	Gradeability, laden/unladen ⁽⁷⁾		%	23 / 26		21 / 25	
	5-9	Acceleration time, laden/unladen (to 15m)		s	4.5 / 4.1		4.6 / 4.1	
	5-10	Service brake			Hydraulic			
	COMBUSTION ENGINE	7-1	Engine manufacturer / type			Yanmar / 4TNV86CHT	Yanmar / 4TNE98	Yanmar / 4TN88G/GN
		7-2	Engine power according to ISO 1585		Kw	44	42	
7-3		Rated speed		min-1	2500	2300	2500	
7-3-1		Torque at 1 / min		(N-m/min)	202 / 1675	200 / 1700	174 / 1690	
7-4		Number of cylinders/displacement		(-) / (cm ³)	4 / 2091	4 / 3053	4 / 2190	
7-5		Fuel consumption according to VDI 2198		ℓ/h or kg/h	3.1	4	3.8	
7-5-1		Fuel consumption according to VDI EN16796		ℓ/h or kg/h	NA			
7-6	Turnover output (Power / ECO)		(1 / h)	76		73		
ADDITIONAL DATA	8-1	Type of drive unit			Automatic			
	10-1	Operating pressure for attachments		bar	175			
	10-2	Oil volume for attachments ⁽⁸⁾		l/min	64			
	10-3	Hydraulic oil tank, capacity		l	64			
	10-4	Fuel tank, capacity		l	42		-	
	10-7	Sound pressure level at the driver's seat ⁽⁹⁾		dB (A)	82	83	82	
	10-7-1	Guaranteed sound power 2001 / 14 / EC		dB (A)	NA			
	10-8	Towing coupling type			Pin			

H3.5A DIESEL/LPG SPECIFICATIONS WITH MECHANICAL TRANSMISSION

GENERAL	1-1	Manufacturer			HYSTER			
	1-2	Model designation			H3.5A			
	1-2-1	Engine		Yanmar 2.1L	Yanmar 3.3L	Yanmar 2.2L		
	1-2-2	CE compliance / Emission standards		Stage V	Non-Certified	Non-Certified & Stage V		
	1-2-3	Transmission		Mechanical Powershift				
	1-2-4	Brake Type		Drum Brakes				
	1-3	Drive		Diesel		LPG		
	1-4	Operator type		Seated				
	1-5	Rated capacity/rated load	Q	t	3.5			
	1-6	Load centre distance	c	mm	500			
	1-8	Load distance, centre of drive axle to fork	x	mm	510			
	1-9	Wheelbase	y	mm	1700			
	WEIGHT	2-1	Axle loading laden, front/rear		kg	4880		
2-2		Axle loading unladen, front/rear		kg	7380 / 1000			
2-3		Tyres, front/rear		kg	1800 / 3070			
WHEELS	3-1	Tyres			Super Elastic			
	3-2	Tyre size, front			28 X 9 - 15			
	3-3	Tyre size, rear			6.5 X 10			
	3-5	Number of wheels, front/rear (X = driven)			2x / 2			
	3-6	Tread, front	b ₁₀	mm	1004			
	3-7	Tread, rear	b ₁₁	mm	982			
	DIMENSIONS	4-1	Tilt of mast / fork carriage forward / backward	α / β	(^o)	6 / 6		
4-2		Height, mast lowered	h ₁	mm	2075			
4-3		Free lift ⁽¹⁾	h ₂	mm	165			
4-4		Lift ⁽¹⁾	h ₃	mm	3000			
4-5		Height, mast extended ⁽²⁾	h ₄	mm	3640			
4-7		Height of overhead guard	h ₆	mm	2175			
4-8		Seat height relating to SIP/stand height ⁽³⁾	h ₇	mm	1168			
4-12		Coupling height	h ₁₀	mm	445			
4-19		Overall length	l ₁	mm	3890			
4-20		Length to face of forks	l ₂	mm	2820			
4-21		Overall width (single / wide / dual)	b ₁	mm	1232 / 1730			
4-22		Fork dimensions DIN ISO 2331	s/e/l	mm	45 X 122 X 1070			
4-23		Fork carriage ISO 2328, class/type A, B			III A			
4-24		Fork carriage width ⁽⁴⁾	b ₃	mm	1100			
4-31		Ground clearance, laden, below mast	m ₁	mm	130			
4-32		Ground clearance, centre of wheelbase	m ₂	mm	203			
4-34-1		Aisle width for pallets 1000 x 1200 crossways	A _{st}	mm	4244			
4-34-2		Aisle width for pallets 800 x 1200 lengthways	A _{st}	mm	4044			
4-35		Turning radius	W _a	mm	2534			
4-36		Internal turning radius	b ₁₃	mm	825			
4-41		90° intersecting aisle (with pallet W = 1200mm, L = 1000mm)			2170			
4-42		Step height (from ground to running board)		mm	462			
4-43		Step height (between intermediate steps between running board and floor)		mm	250			
PERFORMANCE	5-1	Travel speed, laden/unladen		km/h	19.0 / 20.0	18.0 / 19.0	19.0 / 20.0	
	5-1-1	Travel speed, laden/unladen, backwards		km/h	19.0 / 20.0	18.0 / 19.0	19.0 / 20.0	
	5-2	Lift speed, laden/unladen ⁽⁵⁾		m/s	0.40 / 0.43	0.37 / 0.40	0.40 / 0.43	
	5-3	Lowering speed, laden/unladen		m/s	0.45 / 0.38			
	5-5	Drawbar pull, laden ⁽⁶⁾		N	21000		20000	
	5-7	Gradeability, laden/unladen ⁽⁷⁾		%	20 / 25		19 / 25	
	5-9	Acceleration time, laden/unladen (to 15m)		s	4.8 / 4.2		5.8 / 4.7	
	5-10	Service brake			Hydraulic			
	COMBUSTION ENGINE	7-1	Engine manufacturer / type			Yanmar / 4TNV86CHT	Yanmar / 4TNE98	Yanmar / 4TN88G/GN
		7-2	Engine power according to ISO 1585		Kw	44	42	
7-3		Rated speed		min-1	2500	2300	2500	
7-3-1		Torque at 1 / min		(N-m/min)	202 / 1675	200 / 1700	174 / 1690	
7-4		Number of cylinders/displacement		(-) / (cm ³)	4 / 2091	4 / 3053	4 / 2190	
7-5		Fuel consumption according to VDI 2198		ℓ/h or kg/h	3.8	4.9	3.9	
7-5-1		Fuel consumption according to VDI EN16796		ℓ/h or kg/h	NA			
7-6	Turnover output (Power / ECO)		(1 / h)	74		72		
ADDITIONAL DATA	8-1	Type of drive unit			Automatic			
	10-1	Operating pressure for attachments		bar	175			
	10-2	Oil volume for attachments ⁽⁸⁾		l/min	64			
	10-3	Hydraulic oil tank, capacity		l	64			
	10-4	Fuel tank, capacity		l	42		-	
	10-7	Sound pressure level at the driver's seat ⁽⁹⁾		dB (A)	82	83	82	
	10-7-1	Guaranteed sound power 2001 / 14 / EC		dB (A)	NA			
	10-8	Towing coupling type			Pin			

H2.0A DIESEL/LPG SPECIFICATIONS WITH ELECTRONIC TRANSMISSION

	Code	Description	General				
			Yanmar 2.1L	Yanmar 3.0L	Yanmar 2.2L		
GENERAL	1-1	Manufacturer	HYSTER				
	1-2	Model designation	H2.0A				
	1-2-1	Engine	Yanmar 2.1L	Yanmar 3.0L	Yanmar 2.2L		
	1-2-2	CE compliance / Emission standards	Stage V	Non-Certified	Non-Certified & Stage V		
	1-2-3	Transmission	Electronic Powershift / Duramatch™ 1-Speed				
	1-2-4	Brake Type	Drum Brakes				
	1-3	Drive	Diesel		LPG		
	1-4	Operator type	Seated				
	1-5	Rated capacity/rated load	Q	t	2		
	1-6	Load centre distance	c	mm	500		
	1-8	Load distance, centre of drive axle to fork	x	mm	470		
	1-9	Wheelbase	y	mm	1650		
	WEIGHT	2-1	Service weight		kg	3613	
2-2		Axle loading laden, front/rear		kg	4981 / 632		
2-3		Axle loading unladen, front/rear		kg	1805 / 1808		
WHEELS	3-1	Tyres, front/rear	Super Elastic				
	3-2	Tyre size, front	7.00 X 12				
	3-3	Tyre size, rear	6.00 X 9				
	3-5	Number of wheels, front/rear (X = driven)	2x / 2				
	3-6	Tread, front	b ₁₀	mm	983		
	3-7	Tread, rear	b ₁₁	mm	958		
	DIMENSIONS	4-1	Tilt of mast / fork carriage forward / backward	α / β	(°)	6 / 6	
4-2		Height, mast lowered	h ₁	mm	2570		
4-3		Free lift ⁽¹⁾	h ₂	mm	50		
4-4		Lift ⁽¹⁾	h ₃	mm	3900		
4-5		Height, mast extended ⁽²⁾	h ₄	mm	4500		
4-7		Height of overhead guard	h ₆	mm	2160		
4-8		Seat height relating to SIP/stand height ⁽³⁾	h ₇	mm	1145		
4-12		Coupling height	h ₁₀	mm	440		
4-19		Overall length	l ₁	mm	3534		
4-20		Length to face of forks	l ₂	mm	2534		
4-21		Overall width (single / wide / dual)	b ₁	mm	1160 / 1280 / 1542		
4-22		Fork dimensions DIN ISO 2331	s/e/l	mm	40 X 100 X 1000		
4-23		Fork carriage ISO 2328, class/type A, B			II A		
4-24		Fork carriage width ⁽⁴⁾	b ₃	mm	1070		
4-31		Ground clearance, laden, below mast	m ₁	mm	130		
4-32		Ground clearance, centre of wheelbase	m ₂	mm	160		
4-34-1		Aisle width for pallets 1000 x 1200 crossways	A _{st}	mm	3861		
4-34-2		Aisle width for pallets 800 x 1200 lengthways	A _{st}	mm	4061		
4-35		Turning radius	W _a	mm	2191		
4-36		Internal turning radius	b ₁₃	mm	640		
4-41		90° intersecting aisle (with pallet W = 1200mm, L = 1000mm)			2018		
4-42		Step height (from ground to running board)		mm	440		
4-43		Step height (between intermediate steps between running board and floor)		mm	250		
PERFORMANCE	5-1	Travel speed, laden/unladen	km/h	18.5 / 18.7	7.5 / 17.8	18.5 / 18.7	
	5-1-1	Travel speed, laden/unladen, backwards	km/h	18.8 / 19.0	17.7 / 18.1	18.8 / 19.0	
	5-2	Lift speed, laden/unladen ⁽⁵⁾	m/s	0.61 / 0.65	0.6 / 0.65	0.61 / 0.65	
	5-3	Lowering speed, laden/unladen	m/s	0.58 / 0.5	0.58 / 0.49	0.58 / 0.50	
	5-5	Drawbar pull, laden ⁽⁶⁾	N	15917	15233	17304	
	5-7	Gradeability, laden/unladen ⁽⁷⁾	%	30 / 30	29 / 30	33 / 30	
	5-9	Acceleration time, laden/unladen (to 15m)	s	5.2 / 4.7	5.05 / 4.48	5.4 / 4.3	
	5-10	Service brake			Hydraulic		
	COMBUSTION ENGINE	7-1	Engine manufacturer / type		Yanmar / 4TNV86CT	Yanmar / 4TNE94L	Yanmar / 4TN88G/GN
		7-2	Engine power according to ISO 1585	Kw	36.6	34.1	42
7-3		Rated speed	min-1	2500	2200	2500	
7-3-1		Torque at 1 / min	(N-m/min)	167 / 1625	162 / 1500	174 / 1690	
7-4		Number of cylinders/displacement	(-) / (cm ³)	4 / 2091	4 / 3053	4 / 2190	
7-5		Fuel consumption according to VDI 2198 (CDP/VDP)	ℓ/h or kg/h	2.5 / 2.3	3.15 / 2.72	2.4 / 2.2	
7-5-1		Fuel consumption according to VDI EN16796 (CDP/VDP)	ℓ/h or kg/h	2.1 / 2.0	2.81 / 2.42	2.1 / 2.0	
7-6	Turnover output (Power / ECO)	(1 / h)	92 / 83	N/A	96 / 85		
ADDITIONAL DATA	8-1	Type of drive unit		Automatic			
	10-1	Operating pressure for attachments	bar	175			
	10-2	Oil volume for attachments ⁽⁸⁾	l/min	64			
	10-3	Hydraulic oil tank, capacity	l	34.2	40.6		
	10-4	Fuel tank, capacity	l	39.9		-	
	10-7	Sound pressure level at the driver's seat ⁽⁹⁾	dB (A)	78	82	77	
	10-7-1	Guaranteed sound power 2001 / 14 / EC	dB (A)	101	N/A	101	
	10-8	Towing coupling type		Pin			

H2.5A DIESEL/LPG SPECIFICATIONS WITH ELECTRONIC TRANSMISSION

GENERAL	1-1	Manufacturer			HYSTER			
	1-2	Model designation			H2.5A			
	1-2-1	Engine		Yanmar 2.1L	Yanmar 3.0L	Yanmar 2.2L		
	1-2-2	CE compliance / Emission standards		Stage V	Non-Certified	Non-Certified & Stage V		
	1-2-3	Transmission		Electronic Powershift / Duramatch™ 1-Speed				
	1-2-4	Brake Type		Drum Brakes				
	1-3	Drive		Diesel	LPG			
	1-4	Operator type		Seated				
	1-5	Rated capacity/rated load	Q	t	2.5			
	1-6	Load centre distance	c	mm	500			
	1-8	Load distance, centre of drive axle to fork	x	mm	470			
	1-9	Wheelbase	y	mm	1650			
	WEIGHT	2-1	Service weight		kg	3990		
2-2		Axle loading laden, front/rear		kg	5698 / 792			
2-3		Axle loading unladen, front/rear		kg	1728 / 2262			
WHEELS	3-1	Tyres, front/rear			Super Elastic			
	3-2	Tyre size, front			7.00 X 12			
	3-3	Tyre size, rear			6.00 X 9			
	3-5	Number of wheels, front/rear (X = driven)			2x / 2			
	3-6	Tread, front	b ₁₀	mm	983			
	3-7	Tread, rear	b ₁₁	mm	958			
	DIMENSIONS	4-1	Tilt of mast / fork carriage forward / backward	α / β	(^o)	6 / 6		
4-2		Height, mast lowered	h ₁	mm	2570			
4-3		Free lift ⁽¹⁾	h ₂	mm	50			
4-4		Lift ⁽¹⁾	h ₃	mm	3900			
4-5		Height, mast extended ⁽²⁾	h ₄	mm	4500			
4-7		Height of overhead guard	h ₆	mm	2160			
4-8		Seat height relating to SIP/stand height ⁽³⁾	h ₇	mm	1145			
4-12		Coupling height	h ₁₀	mm	440			
4-19		Overall length	l ₁	mm	3610			
4-20		Length to face of forks	l ₂	mm	2610			
4-21		Overall width (single / wide / dual)	b ₁	mm	1160 / 1280 / 1542			
4-22		Fork dimensions DIN ISO 2331	s/e/l	mm	40 X 100 X 1000			
4-23		Fork carriage ISO 2328, class/type A, B			II A			
4-24		Fork carriage width ⁽⁴⁾	b ₃	mm	1070			
4-31		Ground clearance, laden, below mast	m ₁	mm	130			
4-32		Ground clearance, centre of wheelbase	m ₂	mm	160			
4-34-1		Aisle width for pallets 1000 x 1200 crossways	A _{st}	mm	3933			
4-34-2		Aisle width for pallets 800 x 1200 lengthways	A _{st}	mm	4133			
4-35		Turning radius	W _a	mm	2263			
4-36		Internal turning radius	b ₁₃	mm	640			
4-41		90° intersecting aisle (with pallet W = 1200mm, L = 1000mm)			2057			
4-42		Step height (from ground to running board)		mm	440			
4-43		Step height (between intermediate steps between running board and floor)		mm	250			
PERFORMANCE	5-1	Travel speed, laden/unladen		km/h	18.4 / 18.7	17.3 / 17.8	18.4 / 18.7	
	5-1-1	Travel speed, laden/unladen, backwards		km/h	18.7 / 19.0	17.6 / 18.1	18.7 / 19.0	
	5-2	Lift speed, laden/unladen ⁽⁵⁾		m/s	0.60 / 0.65	0.59 / 0.65	0.60 / 0.65	
	5-3	Lowering speed, laden/unladen		m/s	0.58 / 0.50	0.58 / 0.49	0.58 / 0.50	
	5-5	Drawbar pull, laden ⁽⁶⁾		N	15758	15074	17145	
	5-7	Gradeability, laden/unladen ⁽⁷⁾		%	26 / 26	24 / 26	28 / 26	
	5-9	Acceleration time, laden/unladen (to 15m)		s	5.5 / 4.8	5.27 / 4.88	5.9 / 4.5	
	5-10	Service brake			Hydraulic			
	COMBUSTION ENGINE	7-1	Engine manufacturer / type			Yanmar / 4TNV86CT	Yanmar / 4TNE94L	Yanmar / 4TN88G/GN
		7-2	Engine power according to ISO 1585		Kw	36.6	34.1	42
7-3		Rated speed		min-1	2500	2200	2500	
7-3-1		Torque at 1 / min		(N-m/min)	167 / 1625	162 / 1500	174 / 1690	
7-4		Number of cylinders/displacement		(-) / (cm ³)	4 / 2091	4 / 3053	4 / 2190	
7-5		Fuel consumption according to VDI 2198 (CDP/VDP)		ℓ/h or kg/h	2.9 / 2.7	3.52 / 3.14	2.7 / 2.5	
7-5-1		Fuel consumption according to VDI EN16796 (CDP/VDP)		ℓ/h or kg/h	2.5 / 2.3	3.14 / 2.8	2.4 / 2.2	
7-6	Turnover output (Power / ECO)		(1 / h)	92 / 83	NA	96 / 85		
ADDITIONAL DATA	8-1	Type of drive unit			Automatic			
	10-1	Operating pressure for attachments		bar	180			
	10-2	Oil volume for attachments ⁽⁸⁾		l/min	60			
	10-3	Hydraulic oil tank, capacity		l	34.2	40.6		
	10-4	Fuel tank, capacity		l	39.9	N/A	-	
	10-7	Sound pressure level at the driver's seat ⁽⁹⁾		dB (A)	78	82	77	
	10-7-1	Guaranteed sound power 2001 / 14 / EC		dB (A)	101	N/A	101	
	10-8	Towing coupling type			Pin			

H2.5A6 DIESEL/LPG SPECIFICATIONS WITH ELECTRONIC TRANSMISSION

GENERAL	1-1		HYSTER			
	1-2		H2.5A6			
WEIGHT	1-2-1		Yanmar 2.1L	Yanmar 3.3L	Yanmar 2.2L	
	1-2-2		Stage V	Tier III	Tier III & Stage V	
	1-2-3		Electronic Powershift / Duramatch 1-Speed			
	1-2-4		Drum Brakes			
	1-3		Diesel	LPG		
	1-4		Seated			
	1-5		Q	t	2.5	
	1-6		c	mm	600	
	1-8		x	mm	495	
WHEELS	1-9		y	mm	1700	
	2-1		kg			
	2-2		kg			
	2-3		kg			
	3-1		Super Elastic			
	3-2		28 X 9 - 15			
	3-3		6.5 X 10			
	3-5		2x / 2			
	3-6		b ₁₀	mm	959	
DIMENSIONS	3-7		b ₁₁	mm	958	
	4-1		α / β	(^o)	6 / 6	
	4-2		h ₁	mm	2592	
	4-3		h ₂	mm	50	
	4-4		h ₃	mm	3900	
	4-5		h ₄	mm	4500	
	4-7		h ₆	mm	2182	
	4-8		h ₇	mm	1167	
	4-12		h ₁₀	mm	452	
	4-19		l ₁	mm	3714	
	4-20		l ₂	mm	2714	
	4-21		b ₁	mm	1186 / 1353 / 1545	
	4-22		s/e/l	mm	50 X 120 X 1000	
	4-23		II A			
	4-24		b ₃	mm	1070	
	4-31		m ₁	mm	152	
	4-32		m ₂	mm	182	
	4-34-1		A _{st}	mm	4027	
	4-34-2		A _{st}	mm	4227	
	4-35		W _a	mm	2333	
	4-36		b ₁₃	mm	660	
	4-41		90° intersecting aisle (with pallet W = 1200mm, L = 1000mm)			
	4-42		mm			
	4-43		mm			
	PERFORMANCE	5-1		km/h	18.5 / 18.7	
		5-1-1		km/h	18.8 / 19.0	
		5-2		m/s	0.60 / 0.65	0.58 / 0.65
5-3		m/s	0.58 / 0.50	0.58 / 0.49	0.58 / 0.5	
5-5		N	19314	20021	16920	
5-7		%	30 / 25	31 / 25	26 / 25	
5-9		s	5.2 / 4.7	5.11 / 4.52	5.1 / 4.5	
5-10		Hydraulic				
COMBUSTION ENGINE		7-1		Yanmar / 4TNV86CT	Yanmar 4TNE94L	Yanmar / 4TN88G/GN
		7-2		Kw	44	42.4
	7-3		min-1	2500	2300	2500
	7-3-1		(N-m/min)	202 / 1675	200 / 1700	174 / 1690
	7-4		(-) / (cm ³)	4 / 2091	4 / 3319	4 / 2190
	7-5		ℓ/h or kg/h	2.8 / 2.6	3.79 / 3.41	2.8 / 2.6
	7-5-1		ℓ/h or kg/h	2.3 / 2.2	3.37 / 3.04	2.5 / 2.3
	7-6		(1 / h)	92 / 83	NA	96 / 85
ADDITIONAL DATA	8-1		Automatic			
	10-1		bar	180		
	10-2		l/min	60		
	10-3		l	34.2	40.6	40.6
	10-4		l	39.9	39.9	-
	10-7		dB (A)	79	82	77
	10-7-1		dB (A)	101	NA	101
	10-8		Pin			

H3.0A DIESEL/LPG SPECIFICATIONS WITH ELECTRONIC TRANSMISSION

GENERAL	1-1	Manufacturer			HYSTER		
	1-2	Model designation			H3.0A		
	1-2-1	Engine		Yanmar 2.1L	Yanmar 3.3L	Yanmar 2.2L	
	1-2-2	CE compliance / Emission standards		Stage V	Non-Certified	Non-Certified & Stage V	
	1-2-3	Transmission		Electronic Powershift / Duramatch™ 1-Speed			
	1-2-4	Brake Type		Drum Brakes			
	1-3	Drive		Diesel	LPG		
	1-4	Operator type		Seated			
	1-5	Rated capacity/rated load	Q	t	3		
	1-6	Load centre distance	c	mm	500		
	1-8	Load distance, centre of drive axle to fork	x	mm	495		
	1-9	Wheelbase	y	mm	1700		
	WEIGHT	2-1	Service weight		kg	4642	
2-2		Axle loading laden, front/rear		kg	6635 / 1007		
2-3		Axle loading unladen, front/rear		kg	1880 / 2762		
WHEELS	3-1	Tyres, front/rear			Super Elastic		
	3-2	Tyre size, front			28 X 9 - 15		
	3-3	Tyre size, rear			6.5 X 10		
	3-5	Number of wheels, front/rear (X = driven)			2x / 2		
	3-6	Tread, front	b ₁₀	mm	959		
	3-7	Tread, rear	b ₁₁	mm	958		
	DIMENSIONS	4-1	Tilt of mast / fork carriage forward / backward	α / β	(^o)	6 / 6	
4-2		Height, mast lowered	h ₁	mm	2692		
4-3		Free lift ⁽¹⁾	h ₂	mm	50		
4-4		Lift ⁽¹⁾	h ₃	mm	3880		
4-5		Height, mast extended ⁽²⁾	h ₄	mm	4552		
4-7		Height of overhead guard	h ₆	mm	2182		
4-8		Seat height relating to SIP/stand height ⁽³⁾	h ₇	mm	1167		
4-12		Coupling height	h ₁₀	mm	462		
4-19		Overall length	l ₁	mm	3746		
4-20		Length to face of forks	l ₂	mm	2746		
4-21		Overall width (single / wide / dual)	b ₁	mm	1186 / 1353 / 1545		
4-22		Fork dimensions DIN ISO 2331	s/e/l	mm	50 X 120 X 1000		
4-23		Fork carriage ISO 2328, class/type A, B			III A		
4-24		Fork carriage width ⁽⁴⁾	b ₃	mm	1070		
4-31		Ground clearance, laden, below mast	m ₁	mm	152		
4-32		Ground clearance, centre of wheelbase	m ₂	mm	182		
4-34-1		Aisle width for pallets 1000 x 1200 crossways	A _{st}	mm	4069		
4-34-2		Aisle width for pallets 800 x 1200 lengthways	A _{st}	mm	4269		
4-35		Turning radius	W _a	mm	2374		
4-36		Internal turning radius	b ₁₃	mm	660		
4-41		90° intersecting aisle (with pallet W = 1200mm, L = 1000mm)			2110		
4-42	Step height (from ground to running board)		mm	462			
4-43	Step height (between intermediate steps between running board and floor)		mm	250			
PERFORMANCE	5-1	Travel speed, laden/unladen		km/h	18.4 / 18.6		
	5-1-1	Travel speed, laden/unladen, backwards		km/h	18.7 / 18.9		
	5-2	Lift speed, laden/unladen ⁽⁵⁾		m/s	0.56 / 0.61	0.51 / 0.57	0.56 / 0.61
	5-3	Lowering speed, laden/unladen		m/s	0.58 / 0.53		
	5-5	Drawbar pull, laden ⁽⁶⁾		N	19160	19867	16766
	5-7	Gradeability, laden/unladen ⁽⁷⁾		%	26 / 24	27 / 24	23 / 24
	5-9	Acceleration time, laden/unladen (to 15m)		s	5.3 / 4.7	5.24 / 4.53	5.2 / 4.5
	5-10	Service brake			Hydraulic		
	COMBUSTION ENGINE	7-1	Engine manufacturer / type		Yanmar / 4TNV86CHT	Yanmar / 4TNE98	Yanmar / 4TN88G/GN
		7-2	Engine power according to ISO 1585		Kw	44	42.4
7-3		Rated speed		min-1	2500	2300	2500
7-3-1		Torque at 1 / min		(N-m/min)	202 / 1675	190 / 1700	174 / 1690
7-4		Number of cylinders/displacement		(-) / (cm ³)	4 / 2091	4 / 3053	4 / 2190
7-5		Fuel consumption according to VDI 2198 (CDP/VDP)		ℓ/h or kg/h	3.2 / 2.9	4.26 / 3.84	3.2 / 2.9
7-5-1		Fuel consumption according to VDI EN16796 (CDP/VDP)		ℓ/h or kg/h	2.6 / 2.4	3.79 / 3.42	2.8 / 2.6
7-6	Turnover output (Power / ECO)		(1 / h)	90 / 82	NA	95 / 84	
ADDITIONAL DATA	8-1	Type of drive unit			Automatic		
	10-1	Operating pressure for attachments		bar	180		
	10-2	Oil volume for attachments ⁽⁸⁾		l/min	60		
	10-3	Hydraulic oil tank, capacity		l	34.2	40.6	
	10-4	Fuel tank, capacity		l	39.9		-
	10-7	Sound pressure level at the driver's seat ⁽⁹⁾		dB (A)	79	82	77
	10-7-1	Guaranteed sound power 2001 / 14 / EC		dB (A)	101	N/A	101
	10-8	Towing coupling type			Pin		

H3.5A DIESEL/LPG SPECIFICATIONS WITH ELECTRONIC TRANSMISSION

	Code	Description	General			
			Unit	Value	Options	
GENERAL	1-1	Manufacturer			HYSTER	
	1-2	Model designation			H3.5A	
	1-2-1	Engine			Yanmar 2.1L Yanmar 3.3L Yanmar 2.2L	
	1-2-2	CE compliance / Emission standards			Stage V Non-Certified Non-Certified& Stage V	
	1-2-3	Transmission			Electronic Powershift / Duramatch™ 1-Speed	
	1-2-4	Brake Type			Drum Brakes	
	1-3	Drive			Diesel LPG	
	1-4	Operator type			Seated	
	1-5	Rated capacity/rated load	Q	t	3.5	
	1-6	Load centre distance	c	mm	500	
	1-8	Load distance, centre of drive axle to fork	x	mm	495	
	1-9	Wheelbase	y	mm	1700	
	WEIGHT	2-1	Service weight		kg	4910
		2-2	Axle loading laden, front/rear		kg	7230 / 1180
2-3		Axle loading unladen, front/rear		kg	1683 / 3227	
WHEELS	3-1	Tyres, front/rear			Super Elastic	
	3-2	Tyre size, front			28 X 9 - 15	
	3-3	Tyre size, rear			6.5 X 10	
	3-5	Number of wheels, front/rear (X = driven)			2x / 2	
	3-6	Tread, front	b ₁₀	mm	959	
	3-7	Tread, rear	b ₁₁	mm	958	
	DIMENSIONS	4-1	Tilt of mast / fork carriage forward / backward	α / β	(°)	6 / 6
4-2		Height, mast lowered	h ₁	mm	2692	
4-3		Free lift ⁽¹⁾	h ₂	mm	50	
4-4		Lift ⁽¹⁾	h ₃	mm	3880	
4-5		Height, mast extended ⁽²⁾	h ₄	mm	4552	
4-7		Height of overhead guard	h ₆	mm	2182	
4-8		Seat height relating to SIP/stand height ⁽³⁾	h ₇	mm	1167	
4-12		Coupling height	h ₁₀	mm	462	
4-19		Overall length	l ₁	mm	3813	
4-20		Length to face of forks	l ₂	mm	2813	
4-21		Overall width (single / wide / dual)	b ₁	mm	1186 / 1353 / 1545	
4-22		Fork dimensions DIN ISO 2331	s/e/l	mm	50 X 120 X 1000	
4-23		Fork carriage ISO 2328, class/type A, B			III A	
4-24		Fork carriage width ⁽⁴⁾	b ₃	mm	1070	
4-31		Ground clearance, laden, below mast	m ₁	mm	152	
4-32		Ground clearance, centre of wheelbase	m ₂	mm	182	
4-34-1		Aisle width for pallets 1000 x 1200 crossways	A _{st}	mm	4144	
4-34-2		Aisle width for pallets 800 x 1200 lengthways	A _{st}	mm	4344	
4-35		Turning radius	W _a	mm	2449	
4-36		Internal turning radius	b ₁₃	mm	660	
4-41		90° intersecting aisle (with pallet W = 1200mm, L = 1000mm)			2149	
4-42		Step height (from ground to running board)		mm	462	
4-43	Step height (between intermediate steps between running board and floor)		mm	250		
PERFORMANCE	5-1	Travel speed, laden/unladen		km/h	18.4 / 18.6	
	5-1-1	Travel speed, laden/unladen, backwards		km/h	18.7 / 18.9	
	5-2	Lift speed, laden/unladen ⁽⁵⁾		m/s	0.56 / 0.61 0.50 / 0.57 0.56 / 0.61	
	5-3	Lowering speed, laden/unladen		m/s	0.58 / 0.53 0.58 / 0.50	
	5-5	Drawbar pull, laden ⁽⁶⁾		N	19021 19728 16626	
	5-7	Gradeability, laden/unladen ⁽⁷⁾		%	24 / 20 25 / 20 21 / 20	
	5-9	Acceleration time, laden/unladen (to 15m)		s	5.5 / 4.8 5.42 / 4.59 5.3 / 4.6	
	5-10	Service brake			Hydraulic	
	COMBUSTION ENGINE	7-1	Engine manufacturer / type			Yanmar / 4TNV86CHT Yanmar / 4TNE98 Yanmar / 4TN88G/GN
		7-2	Engine power according to ISO 1585	Kw		44 42.4 42
7-3		Rated speed	min-1		2500 2300 2500	
7-3-1		Torque at 1 / min	(N-m/min)		202 / 1675 190 / 1700 174 / 1690	
7-4		Number of cylinders/displacement	(-) / (cm ³)		4 / 2091 4 / 3053 4 / 2190	
7-5		Fuel consumption according to VDI 2198 (CDP/VDP)	ℓ/h or kg/h		3.5 / 3.2 4.80 / 4.34 3.5 / 3.2	
7-5-1		Fuel consumption according to VDI EN16796 (CDP/VDP)	ℓ/h or kg/h		2.9 / 2.6 4.03 / 3.87 3.1 / 2.8	
7-6		Turnover output (Power / ECO)	(1 / h)		89 / 81 NA 95 / 84	
ADDITIONAL DATA	8-1	Type of drive unit			Automatic	
	10-1	Operating pressure for attachments		bar	180	
	10-2	Oil volume for attachments ⁽⁸⁾		l/min	60	
	10-3	Hydraulic oil tank, capacity		l	34.2 40.6	
	10-4	Fuel tank, capacity		l	39.9 -	
	10-7	Sound pressure level at the driver's seat ⁽⁹⁾		dB (A)	79 82 77	
	10-7-1	Guaranteed sound power 2001 / 14 / EC		dB (A)	101 N/A 101	
	10-8	Towing coupling type			Pin	

MAST AND CAPACITY INFORMATION WITH MECHANICAL TRANSMISSION

NOTES

- (1) = Top of forks.
- (2) = Without load backrest.
- (3) = Full suspension seat to manufacturers SIP.
- (4) = Add 32mm with load backrest.
- (5) = Constant displacement hydraulic pump (CDP).
- (6) = At 1.6km/h.
- (7) = At 4.8km/h.
- (8) = Variable.
- (9) = LPAZ, measured according to the test cycles and based on the weighting values contained in EN12053.

Spec sheet truck based on:- 3290mm (H2.0-2.5 A) / 3105mm (H3.0-3.5 A) TOF 2 stage LFL Mast with standard carriage, 1000 mm forks with manual levers. Including optional Noise Reduction Package.

CERTIFICATION: Hyster lift trucks meet the design and construction requirements of B56.1-1969, per OSHA Section 1910.178(a)(2), and also comply with the B56.1 revision in effect at time of manufacture. Certification of compliance with the applicable ANSI standards appears on the lift truck. Performance specifications are for a truck equipped as described under Standard Equipment on this technical guide. Performance specifications are affected by the condition of the vehicle and how it is equipped, as well as by the nature, condition of the operating area, proper service and maintenance of the vehicle. If these specifications are critical, the proposed application should be discussed with your dealer.

H2.0A RATED CAPACITY @ 500MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 500mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sideshift (kg)	With sideshift (kg)	Without sideshift (kg)	With sideshift (kg)
2-STAGE LIMITED FREE LIFT	3000	2010	3575	3990	160	6	2000	2000	2000	2000
	3300	2160	3875	4290	160	6	2000	2000	2000	2000
	3500	2260	4075	4490	160	6	2000	2000	2000	1970
	3700	2360	4275	4690	160	6	2000	2000	2000	1940
	4000	2560	4575	4990	160	6	2000	1980	2000	1920
	4500	2810	5075	5490	160	6	1900	1840	1840	1770
	5000	3060	5575	5990	160	6	1790	1750	1610	1570
	5500	3360	6075	6490	160	6	1510	1480	1150	1120
2-STAGE FULL FREE LIFT	6000	3610	6575	6990	160	6	1190	1170	870	840
	3000	2010	3590	3990	1020	6	2000	2000	2000	2000
	3300	2160	3890	4290	1170	6	2000	2000	2000	1980
	3500	2260	4090	4490	1270	6	2000	2000	2000	1940
3-STAGE FULL FREE LIFT	4350	2010	4867	5340	1020	6	1940	1850	1870	1790
	4500	2060	5017	5490	1070	6	1900	1810	1850	1760
	4800	2160	5317	5790	1170	6	1830	1750	1760	1700
	5000	2260	5517	5990	1270	6	1780	1700	1710~	1640~
	5500	2425	6017	6490	1430	6	1650~	1580~	1590~	1520~
	6000	2610	6517	6990	1620	6	1510~	1440~	1490~	1420~
6500	2825	7017	7490	1835	6	1360~	1300~	1340~	1280~	

~ Dual tread specification

H2.0A RATED CAPACITY @ 600MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 600mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sideshift (kg)	With sideshift (kg)	Without sideshift (kg)	With sideshift (kg)
2-STAGE LIMITED FREE LIFT	3000	2010	3575	3990	160	6	1800	1800	1800	1800
	3300	2160	3875	4290	160	6	1800	1800	1800	1800
	3500	2260	4075	4490	160	6	1800	1800	1800	1800
	3700	2360	4275	4690	160	6	1800	1800	1800	1780
	4000	2560	4575	4990	160	6	1800	1800	1800	1770
	4500	2810	5075	5490	160	6	1710	1680	1690	1630
	5000	3060	5575	5990	160	6	1610	1590	1550	1520
	5500	3360	6075	6490	160	6	1480	1440	1130	1080
2-STAGE FULL FREE LIFT	6000	3610	6575	6990	160	6	1170	1130	850	820
	3000	2010	3590	3990	1020	6	1800	1800	1800	1800
	3300	2160	3890	4290	1170	6	1800	1800	1800	1800
	3500	2260	4090	4490	1270	6	1800	1800	1800	1780
3-STAGE FULL FREE LIFT	4350	2010	4867	5340	1020	6	1740	1670	1710	1650
	4500	2060	5017	5490	1070	6	1710	1640	1700	1630
	4800	2160	5317	5790	1170	6	1650	1580	1640	1570
	5000	2260	5517	5990	1270	6	1600	1530	1520	1470
	5500	2425	6017	6490	1430	6	1450	1400	1470~	1400~
	6000	2610	6517	6990	1620	6	1360~	1300~	1350~	1290~
6500	2825	7017	7490	1835	6	1220~	1170~	1210~	1150~	

~ Dual tread specification

MAST AND CAPACITY INFORMATION WITH MECHANICAL TRANSMISSION

H2.5A RATED CAPACITY @ 500MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 500mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sideshift (kg)	With sideshift (kg)	Without sideshift (kg)	With sideshift (kg)
2-STAGE LIMITED FREE LIFT	3000	2010	3575	3990	160	6	2500	2500	2500	2500
	3300	2160	3875	4290	160	6	2500	2500	2500	2500
	3500	2260	4075	4490	160	6	2500	2500	2500	2500
	3700	2360	4275	4690	160	6	2500	2500	2500	2490
	4000	2560	4575	4990	160	6	2500	2500	2500	2460
	4500	2810	5075	5490	160	6	2390	2350	2090	2040
	5000	3060	5575	5990	160	6	2270	2240	1810	1770
	5500	3360	6075	6490	160	6	1900	1860	1350	1320
2-STAGE FULL FREE LIFT	3000	2010	3590	3990	1020	6	2500	2500	2500	2500
	3300	2160	3890	4290	1170	6	2500	2500	2500	2500
	3500	2260	4090	4490	1270	6	2500	2500	2500	2500
3-STAGE FULL FREE LIFT	4350	2010	4867	5340	1020	6	2380	2270	2100	2040
	4500	2060	5017	5490	1070	6	2340	2240	2040	1980
	4800	2160	5317	5790	1170	6	2260	2170	1920	1860
	5000	2260	5517	5990	1270	6	2190	2110	2200~	2110~
	5500	2425	6017	6490	1430	6	2070~	1980~	2060~	1980~
	6000	2610	6517	6990	1620	6	1920~	1840~	1910~	1830~
	6500	2825	7017	7490	1835	6	1760~	1680~	1690~	1650~

~ Dual tread specification

H2.5A RATED CAPACITY @ 600MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 600mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sideshift (kg)	With sideshift (kg)	Without sideshift (kg)	With sideshift (kg)
2-STAGE LIMITED FREE LIFT	3000	2010	3575	3990	160	6	2300	2300	2300	2300
	3300	2160	3875	4290	160	6	2300	2300	2300	2300
	3500	2260	4075	4490	160	6	2300	2300	2300	2300
	3700	2360	4275	4690	160	6	2300	2300	2300	2290
	4000	2560	4575	4990	160	6	2300	2300	2300	2260
	4500	2810	5075	5490	160	6	2200	2160	2000	1960
	5000	3060	5575	5990	160	6	2090	2070	1750	1700
	5500	3360	6075	6490	160	6	1840	1800	1310	1270
2-STAGE FULL FREE LIFT	3000	2010	3590	3990	1020	6	2300	2300	2300	2300
	3300	2160	3890	4290	1170	6	2300	2300	2300	2300
	3500	2260	4090	4490	1270	6	2300	2300	2300	2390
3-STAGE FULL FREE LIFT	4350	2010	4867	5340	1020	6	2140	2060	2060	2010
	4500	2060	5017	5490	1070	6	2110	2020	2000	1940
	4800	2160	5317	5790	1170	6	2040	1960	1890	1840
	5000	2260	5517	5990	1270	6	1990	1910	1990~	1910~
	5500	2425	6017	6490	1430	6	1870~	1790~	1860~	1790~
	6000	2610	6517	6990	1620	6	1730~	1660~	1720~	1650~
	6500	2825	7017	7490	1835	6	1580~	1520~	1570~	1510~

~ Dual tread specification

MAST AND CAPACITY INFORMATION WITH MECHANICAL TRANSMISSION

H3.OA RATED CAPACITY @ 500MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 500mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sidseshift (kg)	With sidseshift (kg)	Without sidseshift (kg)	With sidseshift (kg)
2-STAGE LIMITED FREE LIFT	3000	2075	3640	4100	165	6	3000	3000	3000	3000
	3300	2225	3940	4400	165	6	3000	3000	3000	3000
	3500	2325	4140	4600	165	6	3000	3000	3000	3000
	3700	2425	4340	4800	165	6	3000	3000	3000	3000
	4000	2625	4640	5100	165	6	3000	3000	3000	2960
	4500	2875	5140	5600	165	6	2890	2830	2750	2720
	5000	3125	5640	6100	165	6	2760	2710	2420	2390
	5500	3425	6140	6600	165	6	2340	2310	1920	1890
2-STAGE FULL FREE LIFT	3000	2075	3650	4100	975	6	3000	3000	3000	3000
	3300	2225	3950	4400	1125	6	3000	3000	3000	3000
	3500	2325	4150	4600	1225	6	3000	3000	3000	3000
3-STAGE FULL FREE LIFT	4350	2075	4950	5450	975	6	2830	2750	2830	2750
	4500	2125	5100	5600	1025	6	2790	2710	2670	2640
	4800	2225	5400	5900	1125	6	2720	2640	2610	2590
	5000	2325	5600	6100	1225	6	2640	2590	2660~	2580~
	5500	2490	6100	6600	1380	6	2520~	2450~	2510~	2440~
	6000	2675	6600	7100	1575	6	2370~	2300~	2350~	2280~
	6500	2890	7100	7600	1790	6	2200~	2140~	2110~	2100~

~ Dual tread specification

H3.OA RATED CAPACITY @ 600MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 600mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sidseshift (kg)	With sidseshift (kg)	Without sidseshift (kg)	With sidseshift (kg)
2-STAGE LIMITED FREE LIFT	3000	2075	3640	4100	165	6	2900	2810	2900	2810
	3300	2225	3940	4400	165	6	2890	2810	2890	2810
	3500	2325	4140	4600	165	6	2880	2800	2880	2800
	3700	2425	4340	4800	165	6	2880	2800	2870	2800
	4000	2625	4640	5100	165	6	2860	2780	2790	2730
	4500	2875	5140	5600	165	6	2670	2600	2600	2540
	5000	3125	5640	6100	165	6	2580	2510	2330	2290
	5500	3425	6140	6600	165	6	2260	2230	1850	1820
2-STAGE FULL FREE LIFT	3000	2075	3650	4100	975	6	2890	2800	2890	2800
	3300	2225	3950	4400	1125	6	2880	2800	2880	2800
	3500	2325	4150	4600	1225	6	2880	2790	2880	2790
3-STAGE FULL FREE LIFT	4350	2075	4950	5450	975	6	2560	2490	2560	2490
	4500	2125	5100	5600	1025	6	2530	2460	2520	2460
	4800	2225	5400	5900	1125	6	2460	2390	2460	2390
	5000	2325	5600	6100	1225	6	2410	2340	2400~	2340~
	5500	2490	6100	6600	1380	6	2280~	2220~	2270~	2210~
	6000	2675	6600	7100	1575	6	2140~	2080~	2120~	2060~
	6500	2890	7100	7600	1790	6	1990~	1940~	1970~	1920~

~ Dual tread specification

MAST AND CAPACITY INFORMATION WITH MECHANICAL TRANSMISSION

H3.5A RATED CAPACITY @ 500MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 500mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sidseshift (kg)	With sidseshift (kg)	Without sidseshift (kg)	With sidseshift (kg)
2-STAGE LIMITED FREE LIFT	3000	2150	3700	4100	170	6	3500	3500	3500	3500
	3300	2300	4000	4400	170	6	3500	3500	3500	3500
	3500	2400	4200	4600	170	6	3500	3500	3500	3500
	3700	2500	4400	4800	170	6	3500	3500	3500	3500
	4000	2700	4700	5100	170	6	3500	3500	3300	3240
	4500	2950	5200	5600	170	6	3380	3380	2960	2900
	5000	3200	5700	6100	170	6	3000	2940	2470	2420
	5500	3500	6200	6600	170	6	2450	2400	1950	1910
2-STAGE FULL FREE LIFT	3000	2150	3680	4100	1050	6	3500	3500	3500	3500
	3300	2300	3980	4400	1200	6	3500	3500	3500	3500
	3500	2400	4180	4600	1300	6	3500	3500	3500	3500
3-STAGE FULL FREE LIFT	4350	2150	4990	5450	1050	6	3310	3210	3070	3030
	4500	2200	5140	5600	1100	6	3270	3180	2870	2840
	4800	2300	5440	5900	1200	6	3090	3060	2640	2610
	5000	2400	5640	6100	1300	6	3130~	3040~	3120~	3040~
	5500	2565	6140	6600	1455	6	2980~	2900~	2970~	2890~
	6000	2750	6640	7100	1650	6	2820~	2740~	2670~	2640~
	6500	2965	7100	7600	1830	6	2550~	2530~	2230~	2200~

~ Dual tread specification

H3.5A RATED CAPACITY @ 600MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 600mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sidseshift (kg)	With sidseshift (kg)	Without sidseshift (kg)	With sidseshift (kg)
2-STAGE LIMITED FREE LIFT	3000	2075	3640	4100	165	6	2900	2810	2900	2810
	3300	2225	3940	4400	165	6	2890	2810	2890	2810
	3500	2325	4140	4600	165	6	2880	2800	2880	2800
	3700	2425	4340	4800	165	6	2880	2800	2870	2800
	4000	2625	4640	5100	165	6	2860	2780	2790	2730
	4500	2875	5140	5600	165	6	2670	2600	2600	2540
	5000	3125	5640	6100	165	6	2580	2510	2330	2290
	5500	3425	6140	6600	165	6	2260	2230	1850	1820
	6000	3675	6640	7100	165	6	1750	1730	1360	1330
2-STAGE FULL FREE LIFT	3000	2075	3650	4100	975	6	2890	2800	2890	2800
	3300	2225	3950	4400	1125	6	2880	2800	2880	2800
	3500	2325	4150	4600	1225	6	2880	2790	2880	2790
3-STAGE FULL FREE LIFT	4350	2075	4950	5450	975	6	2560	2490	2560	2490
	4500	2125	5100	5600	1025	6	2530	2460	2520	2460
	4800	2225	5400	5900	1125	6	2460	2390	2460	2390
	5000	2325	5600	6100	1225	6	2410	2340	2400~	2340~
	5500	2490	6100	6600	1380	6	2280~	2220~	2270~	2210~
	6000	2675	6600	7100	1575	6	2140~	2080~	2120~	2060~
	6500	2890	7100	7600	1790	6	1990~	1940~	1970~	1920~

~ Dual tread specification

MAST AND CAPACITY INFORMATION WITH ELECTRONIC TRANSMISSION

H2.0A RATED CAPACITY @ 500MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 500mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sidershift (kg)	With sidershift (kg)	Without sidershift (kg)	With sidershift (kg)
2-STAGE LIMITED FREE LIFT	2960	2020	3570	4180	50	6	2000	2000	2000	2000
	3260	2170	3870	4480	50	6	2000	2000	2000	2000
	3560	2320	4170	4780	50	6	2000	2000	2000	2000
	3900	2570	4510	5120	50	6	2000	2000	2000	2000
	4200	2720	4810	5420	50	6	2000	2000	2000	2000
	4500	2870	5110	5720	50	6	1980	1980	1980	1980
	4800	3020	5410	6020	50	6	1920	1910	1920	1910
	5000	3220	5610	6220	50	6	1880	1860	1880	1860
2-STAGE FULL FREE LIFT	5500	3470	6110	6720	50	6	1770	1750	1650	1640
	2990	2020	3597	4210	1373	6	2000	2000	2000	2000
	3340	2170	3947	4560	1523	6	2000	2000	2000	2000
	3440	2220	4047	4660	1573	6	2000	2000	2000	2000
	3540	2270	4147	4760	1623	6	2000	2000	2000	2000
	3740	2370	4347	4960	1723	6	2000	2000	2000	2000
	4060	2570	4667	5280	1923	6	2000	2000	2000	2000
	4560	2820	5167	5780	2173	6	1960	1960	1960	1960
3-STAGE FULL FREE LIFT	4960	3020	5567	6180	2373	6	1880	1870	1880	1870
	5560	3370	6167	6780	2723	6	1750	1730	1740~	1720~
	4100	2020	4699	5320	1381	6	2000	1970	2000	1970
	4400	2020	4999	5620	1381	6	2000	1970	2000	1970
	4650	2070	5249	5870	1431	6	1950	1920	1860	1840
	4950	2170	5549	6170	1531	6	1890	1860	1890~	1850~
	5250	2320	5849	6470	1681	6	1830	1810	1790~	1780~
	6150	2670	6749	7370	2031	6	1620~	1560~	1350~	1330~
	6450	2820	7049	7670	2181	6	1540~	1480~	1220~	1210~
	6900	3020	7497	7815	2540	6	1210	1190	840	810

~ Wide tread specification

H2.0A RATED CAPACITY @ 600MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 600mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sidershift (kg)	With sidershift (kg)	Without sidershift (kg)	With sidershift (kg)
2-STAGE LIMITED FREE LIFT	2960	2020	3570	4180	50	6	1910	1850	1910	1850
	3260	2170	3870	4480	50	6	1900	1840	1900	1840
	3560	2320	4170	4780	50	6	1900	1840	1900	1840
	3900	2570	4510	5120	50	6	1890	1830	1890	1830
	4200	2720	4810	5420	50	6	1880	1820	1880	1820
	4500	2870	5110	5720	50	6	1860	1800	1860	1800
	4800	3020	5410	6020	50	6	1800	1740	1800	1740
	5000	3220	5610	6220	50	6	1750	1690	1750	1690
2-STAGE FULL FREE LIFT	5500	3470	6110	6720	50	6	1640	1590	1640	1580
	2990	2020	3597	4210	1373	6	1910	1850	1910	1850
	3340	2170	3947	4560	1523	6	1900	1840	1900	1840
	3440	2220	4047	4660	1573	6	1900	1840	1900	1840
	3540	2270	4147	4760	1623	6	1900	1840	1900	1840
	3740	2370	4347	4960	1723	6	1890	1830	1890	1830
	4060	2570	4667	5280	1923	6	1890	1820	1890	1820
	4560	2820	5167	5780	2173	6	1840	1780	1840	1780
3-STAGE FULL FREE LIFT	4960	3020	5567	6180	2373	6	1760	1700	1760	1700
	5560	3370	6167	6780	2723	6	1620	1570	1620~	1560~
	4100	2020	4699	5320	1381	6	1850	1790	1850	1790
	4400	2020	4999	5620	1381	6	1850	1790	1850	1790
	4650	2070	5249	5870	1431	6	1810	1750	1810	1750
	4950	2170	5549	6170	1531	6	1750	1690	1750~	1690~
	5250	2320	5849	6470	1681	6	1700	1640	1680~	1620~
	6150	2670	6749	7370	2031	6	1480	1430	1370~	1350~
	6450	2820	7049	7670	2181	6	1400	1360	1240~	1220~
	6900	3020	7497	7815	2540	6	1270	1230	1070~	1040~

~ Wide tread specification

MAST AND CAPACITY INFORMATION WITH ELECTRONIC TRANSMISSION

H2.5A RATED CAPACITY @ 500MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 500mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sideshift (kg)	With sideshift (kg)	Without sideshift (kg)	With sideshift (kg)
2-STAGE LIMITED FREE LIFT	2960	2020	3570	4180	50	6	2500	2500	2500	2500
	3260	2170	3870	4480	50	6	2500	2500	2500	2500
	3560	2320	4170	4780	50	6	2500	2450	2450	2450
	3900	2570	4510	5120	50	6	2500	2440	2440	2440
	4200	2720	4810	5420	50	6	2500	2430	2430	2430
	4500	2870	5110	5720	50	6	2470	2410	2410	2410
	4800	3020	5410	6020	50	6	2410	2340	2340	2330~
	5000	3220	5610	6220	50	6	2360	2280	2280	2280~
2-STAGE FULL FREE LIFT	5500	3470	6110	6720	50	6	2240	2160	2160	2150~
	2990	2020	3597	4210	1373	6	2500	2460	2460	2460
	3340	2170	3947	4560	1523	6	2500	2460	2460	2460
	3440	2220	4047	4660	1573	6	2500	2450	2450	2450
	3540	2270	4147	4760	1623	6	2500	2450	2450	2450
	3740	2370	4347	4960	1723	6	2500	2450	2450	2450
	4060	2570	4667	5280	1923	6	2500	2440	2440	2440
	4560	2820	5167	5780	2173	6	2460	2390	2390	2380
3-STAGE FULL FREE LIFT	4960	3020	5567	6180	2373	6	2370	2290	2290	2290~
	5560	3370	6167	6780	2723	6	2220	2140	2140	2130~
	4000	2020	4599	5220	1381	6	2500	2500	2500	2500
	4100	2020	4699	5320	1381	6	2500	2430	2430	2410
	4300	2020	4899	5520	1381	6	2500	2430	2430	2275
	4650	2070	5249	5870	1431	6	2440	2380	2380	1950
	4950	2170	5549	6170	1531	6	2380	2310	2310	2100~
	5100	2270	5699	6320	1631	6	2350	2260	2260	1990~
	5550	2420	6149	6770	1781	6	2230~	2150~	2150~	1700~
	5700	2520	6299	6920	1881	6	2190~	2110~	2110~	1600~
6150	2670	6749	7370	2031	6	2060~	1990~	1990~	1350~	
6450	2820	7049	7670	2181	6	1880~	1870~	1870~	1200~	
6900	3020	7499	8120	2381	6	1610~	1560~	1560~	990~	

H2.5A RATED CAPACITY @ 600MM LOAD CENTRE

~ Wide tread specification

	Maximum Fork Lift (mm)	Lowered height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 600mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sideshift (kg)	With sideshift + Fork Positioner (kg)	Without sideshift (kg)	With sideshift + Fork Positioner (kg)
2-STAGE LIMITED FREE LIFT	2960	2020	3570	4180	50	6	2310	2240	2310	2240
	3260	2170	3870	4480	50	6	2360	2290	2360	2290
	3560	2320	4170	4780	50	6	2300	2230	2300	2230
	3900	2570	4510	5120	50	6	2290	2220	2290	2220
	4200	2720	4810	5420	50	6	2280	2210	2280	2210
	4500	2870	5110	5720	50	6	2260	2190	2260	2190
	4800	3020	5410	6020	50	6	2190	2120	2190~	2120~
	5000	3220	5610	6220	50	6	2140	2070	2140~	2070~
2-STAGE FULL FREE LIFT	5500	3470	6110	6720	50	6	2030	1960	2020~	1960~
	2990	2020	3597	4210	1373	6	2310	2240	2310	2240
	3340	2170	3947	4560	1523	6	2300	2230	2300	2230
	3440	2220	4047	4660	1573	6	2300	2230	2300	2230
	3540	2270	4147	4760	1623	6	2300	2230	2300	2230
	3740	2370	4347	4960	1723	6	2290	2220	2290	2220
	4060	2570	4667	5280	1923	6	2290	2210	2290	2210
	4560	2820	5167	5780	2173	6	2240	2170	2240	2170
3-STAGE FULL FREE LIFT	4960	3020	5567	6180	2373	6	2150	2080	2150~	2080~
	5560	3370	6167	6780	2723	6	2010	1940	2000~	1940~
	4000	2020	4599	5220	1381	6	2280	2210	2280	2210
	4100	2020	4699	5320	1381	6	2280	2210	2280	2210
	4300	2020	4899	5520	1381	6	2280	2210	2215	2175
	4650	2070	5249	5870	1431	6	2230	2160	2230~	2160~
	4950	2170	5549	6170	1531	6	2170	2100	2120~	2090~
	5100	2270	5699	6320	1631	6	2130	2065	2030~	2020~
	5550	2420	6149	6770	1781	6	2020~	1950	1730~	1720~
	5700	2520	6299	6920	1881	6	1980~	1920	1650~	1630
6150	2670	6749	7370	2031	6	1860~	1800~	1390~	1370~	
6450	2820	7049	7670	2181	6	1780~	1720~	1250~	1220~	
6900	3020	7499	8120	2381	6	1610~	1560~	1040~	1010~	

~ Wide tread specification

MAST AND CAPACITY INFORMATION WITH ELECTRONIC TRANSMISSION

H2.5A6 RATED CAPACITY @ 500MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 500mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sideshift (kg)	With sideshift + Fork Positioner (kg)	Without sideshift (kg)	With sideshift + Fork Positioner (kg)
2-STAGE LIMITED FREE LIFT	2960	2042	3570	4180	50	6	2700	2700	2700	2700
	3260	2192	3870	4480	50	6	2700	2700	2700	2700
	3560	2342	4170	4780	50	6	2700	2700	2700	2700
	3900	2592	4510	5120	50	6	2700	2690	2700	2690
	4200	2742	4810	5420	50	6	2700	2680	2700	2680
	4500	2892	5110	5720	50	6	2680	2660	2670	2660
	4800	3042	5410	6020	50	6	2610	2590	2560	2560
	5000	3242	5610	6220	50	6	2570	2540	2420	2420
2-STAGE FULL FREE LIFT	5500	3492	6110	6720	50	6	2450	2410	2440~	2430~
	2990	2042	3597	4210	1395	6	2700	2700	2700	2700
	3340	2192	3497	4560	1545	6	2700	2700	2700	2700
	3440	2242	4047	4660	1595	6	2700	2700	2700	2700
	3540	2292	4147	4760	1645	6	2700	2700	2700	2700
	3740	2392	4347	4960	1745	6	2700	2700	2700	2700
	4060	2592	4667	5280	1945	6	2700	2690	2700	2690
	4560	2842	5167	5780	2195	6	2660	2640	2650	2640
3-STAGE FULL FREE LIFT	4960	3042	5567	6180	2395	6	2570	2540	2570~	2570~
	5560	3392	6167	6780	2745	6	2430	2640	2420~	2420~
	4000	2042	4599	5220	1403	6	2700	2680	2700	2700
	4100	2042	4699	5320	1403	6	2700	2680	2700	2680
	4300	2042	4899	5520	1403	6	2700	2680	2590	2590
	4650	2092	5249	5870	1453	6	2640	2640	2640~	2640~
	4950	2192	5549	6170	1553	6	2550	2560	2580~	2580~
	5100	2292	5699	6320	1653	6	2580~	2550~	2540~	2540~
	5550	2442	6149	6770	1803	6	2440~	2440~	2250~	2250~
	5700	2542	6299	6920	1903	6	2400~	2400~	2150~	2140~
6150	2692	6749	7370	2053	6	2190~	2140~	1870~	1850~	
6450	2842	7049	7670	2203	6	1940~	1890~	1690~	1670~	
6900	3042	7499	8120	2403	6	1610~	1560~	1440~	1420~	

~ Wide tread specification

H2.5A6 RATED CAPACITY @ 600MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 600mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sideshift (kg)	With sideshift + Fork Positioner (kg)	Without sideshift (kg)	With sideshift + Fork Positioner (kg)
2-STAGE LIMITED FREE LIFT	2960	2042	3570	4180	50	6	2530	2530	2530	2530
	3260	2192	3870	4480	50	6	2530	2530	2530	2530
	3560	2342	4170	4780	50	6	2530	2530	2530	2530
	3900	2592	4510	5120	50	6	2530	2530	2530	2530
	4200	2742	4810	5420	50	6	2530	2530	2530	2530
	4500	2892	5110	5720	50	6	2530	2530	2530	2530
	4800	3042	5410	6020	50	6	2530	2530	2530	2530
	5000	3242	5610	6220	50	6	2530	2530	2430	2420
2-STAGE FULL FREE LIFT	5500	3492	6110	6720	50	6	2450	2430	2440~	2410~
	2990	2042	3597	4210	1395	6	2530	2530	2530	2530
	3340	2192	3497	4560	1545	6	2530	2530	2530	2530
	3440	2242	4047	4660	1595	6	2530	2530	2530	2530
	3540	2292	4147	4760	1645	6	2530	2530	2530	2530
	3740	2392	4347	4960	1745	6	2530	2530	2530	2530
	4060	2592	4667	5280	1945	6	2530	2530	2530	2530
	4560	2842	5167	5780	2195	6	2530	2530	2530	2530
3-STAGE FULL FREE LIFT	4960	3042	5567	6180	2395	6	2530	2530	2520	2520
	5560	3392	6167	6780	2745	6	2430	2390	2420~	2380~
	4000	2042	4599	5220	1403	6	2530	2530	2530	2530
	4100	2042	4699	5320	1403	6	2530	2530	2530	2530
	4300	2042	4899	5520	1403	6	2530	2530	2530	2530
	4650	2092	5249	5870	1453	6	2530	2530	2530~	2530~
	4950	2192	5549	6170	1553	6	2530	2530	2530~	2530~
	5100	2292	5699	6320	1653	6	2450	2450	2530~	2510~
	5550	2442	6149	6770	1803	6	2440~	2400~	2280~	2270~
	5700	2542	6299	6920	1903	6	2400~	2360~	2180~	2170~
6150	2692	6749	7370	2053	6	2190~	2140~	1900~	1880~	
6450	2842	7049	7670	2203	6	1940~	1890~	1720~	1700~	
6900	3042	7499	8120	2403	6	1610~	1560~	1470~	1450~	

~ Wide tread specification

MAST AND CAPACITY INFORMATION WITH ELECTRONIC TRANSMISSION

H3.OA RATED CAPACITY @ 500MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 500mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sideshift (kg)	With sideshift (kg)	Without sideshift (kg)	With sideshift (kg)
2-STAGE LIMITED FREE LIFT	2980	50	2142	3662	4198	6	3000	2920	3000	2920
	3280	50	2292	3962	4498	6	3000	2920	3000	2920
	3380	50	2342	4062	4598	6	3000	2910	3000	2910
	3580	50	2442	4262	4798	6	3000	2910	3000	2910
	3880	50	2692	4562	5098	6	3000	2900	3000	2900
	4180	50	2842	4862	5398	6	3000	2890	3000	2890
	4480	50	2992	5162	5698	6	2930	2830	2920	2820
	4780	50	3242	5462	5998	6	2870	2750	2670	2670
	5480	50	3592	6162	6698	6	2690	2580	2690~	2570~
5880	50	3892	6562	7098	6	2570~	2460~	2570~	2450~	
2-STAGE FULL FREE LIFT	3000	1362	2092	3684	4224	6	3000	2940	3000	2940
	3200	1462	2192	3884	4424	6	3000	2940	3000	2940
	3500	1612	2342	4184	4724	6	3000	2930	3000	2930
	3700	1712	2442	4384	4924	6	3000	2930	3000	2930
	4000	1912	2642	4684	5224	6	3000	2920	3000	2920
	4500	2162	2892	5184	5724	6	2930	2840	2930	2840
	5000	2462	3192	5684	6224	6	2820	2720	2820~	2720~
	5400	2662	3392	6084	6624	6	2720	2620	2720~	2610~
3-STAGE FULL FREE LIFT	4020	1320	2042	4690	5238	6	3000	2900	3000	2900
	4320	1370	2092	4990	5538	6	2970	2870	2960~	2870~
	4620	1470	2192	5290	5838	6	2900	2800	2900~	2800~
	4920	1620	2342	5590	6138	6	2740	2730	2830~	2730~
	5520	1870	2592	6190	6738	6	2670~	2580~	2390~	2380~
	6120	2120	2842	6790	7338	6	2390~	2380~	1950~	1930~
	6570	2320	3042	7240	7788	6	2050~	2050~	1650~	1630~
	7020	2470	3192	7690	8238	6	1750~	1740~	1380~	1370~

~ Wide tread specification

H3.OA RATED CAPACITY @ 600MM LOAD CENTRE

	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 600mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sideshift (kg)	With sideshift (kg)	Without sideshift (kg)	With sideshift (kg)
2-STAGE LIMITED FREE LIFT	2980	50	2142	3662	4198	6	2770	2660	2770	2660
	3280	50	2292	3962	4498	6	2770	660	2770	2660
	3380	50	2342	4062	4598	6	2770	2650	2770	2660
	3580	50	2442	4262	4798	6	2760	2650	2760	2650
	3880	50	2692	4562	5098	6	2750	2640	2750	2640
	4180	50	2842	4862	5398	6	2740	2630	2740	2630
	4480	50	2992	5162	5698	6	2680	2570	2680	2570
	4780	50	3242	5462	5998	6	2610	2510	2610	2500
	5480	50	3592	6162	6698	6	2450	2350	2440~	2340~
5880	50	3892	6562	7098	6	2340	2240	2330~	2240~	
2-STAGE FULL FREE LIFT	3000	1362	2092	3684	4224	6	2770	2680	2770	2680
	3200	1462	2192	3884	4424	6	2770	2670	2770	2670
	3500	1612	2342	4184	4724	6	2760	2670	2760	2670
	3700	1712	2442	4384	4924	6	2760	2660	2760	2660
	4000	1912	2642	4684	5224	6	2750	2660	2750	2660
	4500	2162	2892	5184	5724	6	2680	2590	2680	2590
	5000	2462	3192	5684	6224	6	2570	2720	2570~	2470
	5400	2662	3392	6084	6624	6	2470	2390	2470~	2380~
3-STAGE FULL FREE LIFT	4020	1320	2042	4690	5238	6	2740	2640	2740	2640
	4320	1370	2092	4990	5538	6	2710	2620	2650	2610
	4620	1470	2192	5290	5838	6	2640	2550	2640~	2550~
	4920	1620	2342	5590	6138	6	2580	2490	2570~	2480~
	5520	1870	2592	6190	6738	6	2430~	2350~	2410~	2340~
	6120	2120	2842	6790	7338	6	2270~	2190~	1980~	1960~
	6570	2320	3042	7240	7788	6	2100~	2070~	1690~	1660~
	7020	2470	3192	7690	8238	6	1800~	1790~	1420~	1400~

~ Wide tread specification

MAST AND CAPACITY INFORMATION WITH ELECTRONIC TRANSMISSION

H3.5A RATED CAPACITY @ 500MM LOAD CENTRE

Type	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 500mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sidseshift (kg)	With sidseshift (kg)	Without sidseshift (kg)	With sidseshift (kg)
2-STAGE LIMITED FREE LIFT	2980	2142	3662	4198	50	6	3500	3460	3500	3460
	3280	2292	3962	4498	50	6	3500	3460	3500	3460
	3380	2342	4062	4598	50	6	3500	3450	3500	3450
	3580	2442	4262	4798	50	6	3500	3450	3500	3450
	3880	2692	4562	5098	50	6	3500	3440	3500	3440
	4180	2842	4862	5398	50	6	3500	3430	3500	3430
	4480	2992	5162	5698	50	6	3430	3300	3430~	3300~
	4780	3242	5462	5998	50	6	3360	3220	3360~	3220~
	5480	3592	6162	6698	50	6	3170~	3040~	3160~	3030~
	5880	3892	6562	7098	50	6	3040~	2920~	2760~	2770~
2-STAGE FULL FREE LIFT	3000	2092	3684	4224	1362	6	3500	3420	3500	3420
	3200	2192	3884	4424	1462	6	3500	3420	3500	3420
	3500	2342	4184	4724	1612	6	3500	3410	3500	3410
	3700	2442	4384	4924	1712	6	3500	3410	3500	3410
	4000	2642	4684	5224	1912	6	3500	3400	3500	3400
	4500	2892	5184	5724	2162	6	3430	3320	3430~	3320~
	5000	3192	5684	6224	2462	6	3310	3190	3310~	3190~
	5400	3392	6084	6624	2662	6	3200~	3080~	3190~	3080~
3-STAGE FULL FREE LIFT	4020	2042	4690	5238	1320	6	3500	3390	3500~	3390~
	4320	2092	4990	5538	1370	6	3460	3360	3460~	3360~
	4620	2192	5290	5838	1470	6	3400~	3290~	3390~	3290~
	4920	2342	5590	6138	1620	6	3330~	3210~	3050~	3060~
	5520	2592	6190	6738	1870	6	3070~	3050~	2460~	2450~
	6120	2842	6790	7338	2120	6	2480~	2480~	1950~	1930~
	6570	3042	7240	7788	2320	6	2830*	2730*	1590~	1580~
	7020	3192	7690	8238	2470	6	2640*	2570*	1310~	1280~

~ Wide tread specification. * Dual tread specification.

H3.5A RATED CAPACITY @ 600MM LOAD CENTRE

Type	Maximum Fork Lift (mm)	Lowered Height (mm)	Extended Height without LBR (mm)	Extended Height with 1220 LBR (mm)	Free Lift Height without LBR (mm)	Back tilt (°)	Capacities (kg) @ 600mm Load Centre			
							Pneumatic Shaped Solid Tyres		Pneumatic Radial Tyres	
							Without sidseshift (kg)	With sidseshift (kg)	Without sidseshift (kg)	With sidseshift (kg)
2-STAGE LIMITED FREE LIFT	2980	2142	3662	4198	50	6	3280	3150	3280	3150
	3280	2292	3962	4498	50	6	3270	3150	3270	3150
	3380	2342	4062	4598	50	6	3270	3150	3270	3150
	3580	2442	4262	4798	50	6	3270	3140	3270	3140
	3880	2692	4562	5098	50	6	3250	3130	3250	3130
	4180	2842	4862	5398	50	6	3250	3070	3190	3070
	4480	2992	5162	5698	50	6	3130	3010	3130~	3010
	4780	3242	5462	5998	50	6	3050	2940	3050~	2930~
	5480	3592	6162	6698	50	6	2880	2770	2870~	2760~
	5880	3892	6562	7098	50	6	2760~	2660~	2760~	2650~
2-STAGE FULL FREE LIFT	3000	2092	3684	4224	1362	6	3220	3110	3220	3110
	3200	2192	3884	4424	1462	6	3220	3110	3220	3110
	3500	2342	4184	4724	1612	6	3210	3110	3210	3110
	3700	2442	4384	4924	1712	6	3210	3100	3210	3100
	4000	2642	4684	5224	1912	6	3200	3090	3200	3090
	4500	2892	5184	5724	2162	6	3130	3020	3090	3020
	5000	3192	5684	6224	2462	6	3010	2910	3000~	2900~
	5400	3392	6084	6624	2662	6	2910	2810	2900~	2800~
3-STAGE FULL FREE LIFT	4020	2042	4690	5238	1320	6	3190	3090	3190~	3090~
	4320	2092	4990	5538	1370	6	3160	3060	3160~	3060~
	4620	2192	5290	5838	1470	6	3100	3000	3090~	2990~
	4920	2342	5590	6138	1620	6	3020~	2880	3020~	2920~
	5520	2592	6190	6738	1870	6	2870~	2770~	2480~	2470~
	6120	2842	6790	7338	2120	6	2530~	2530~	1980~	1970~
	6570	3042	7240	7788	2320	6	2570*	2480*	1640~	1620~
	7020	3192	7690	8238	2470	6	2420*	2340*	1340~	1310~

~ Wide tread specification. * Dual tread specification.

AVAILABLE OPTIONS

PERFORMANCE	HANDLING	ERGONOMICS (continued)
Yanmar 2.2L LPG Non-Certified	Hook Type Standard Carriage - 1070mm	Clear View Overhead Guard
Yanmar 2.2L Dual Fuel Non-Certified	Hook Type Standard Carriage - 1220mm	Cabin Options (Partial, PVC, Steel Doors)
Yanmar 3.0L Diesel Non-Certified	Hook Type Integral Sideshift Carriage - 1070mm	High Specification Cabin
Yanmar 3.3L Diesel Non-Certified	Hook Type Integral Sideshift Carriage - 1220mm	Rear Drive Handle with Horn Button
Yanmar 2.1L DPF (37 kW) Diesel	Hook Type Integral Sideshifting Fork Positioner - 1070mm	Console Tray
Yanmar 2.1L DPF with CAC (44 kW) Diesel	Hook Type Integral Sideshifting Fork Positioner - 1220mm	LCD Dash Display
Yanmar 2.2L LPG Stage V	Type Standard Taper Forks 1000mm	Full Colour Touchscreen Display
Mechanical Powershift Transmission	Type Standard Taper Forks 1100mm	Full Suspension Vinyl Seat
Electrical Powershift Transmission	Hook Type Standard Taper Forks 1200mm	Full Suspension Cloth Seat
Duramatch™ Transmission	Without Load backrest	Full Suspension Vinyl Seat - Value
Drum Brakes	1220mm High Load Backrest	Air Ride Full Suspension Vinyl Seat
Oil immersed brakes	915mm High Load Backrest	Air Ride Full Suspension Cloth Seat
Standard (-20° C to 40° C) Environmental construction	915mm High Load Backrest Drop Centre	Full suspension seat - Low profile
Hot (-20° C to >40° C) Environmental construction	1524mm High Load Backrest	Sun Shades (top and / or front)
High Air Intake	Tilt Cylinder Boats	Air Conditioning
Heavy duty air intake and pre-cleaner options	Hydraulic Accumulator	Accessory Mounting Post and options
Internal Air Intake	Manual Lever Hydraulic Control	12v Aux supply
Swing Out and Drop Down LPG tank bracket	Mini Lever Hydraulic Control	12v Supply with twin USB charging sockets
LPG tank bracket interlock	Joystick Hydraulic Control	OPERATION
Integrated Fuel Level Sensor	High temperature hydraulic fluid	Traction speed limiters
Engine driven cooling system	Clamping function	Seat belt Hi-Vis interlocking
On-demand cooling system	Return to set tilt function	Key Switch Start
Low Exhaust	2 Function (0 Auxiliary) Hydraulic Valve	Keyless with Operator password start
Overhead Exhaust	3 Function (1 Auxiliary) Hydraulic Valve	Engine driven cooling
System monitoring package	4 Function (2 Auxiliary) Hydraulic Valve	Travel speed Alarm
Premium monitoring package	Fork Laser Positioning System	Battery disconnect
Powertrain Protection with engine shutdown	Height Selector	Front Mud Guards
Radiator Screen	Load Weight Display	Drive axle string cutter
Exhaust wraps	Attachment extension tubes and quick disconnects	Standard Seat Belt
Empty seat engine shutdown	VISIBILITY	Hi VIS Red Seat Belt
Belly screen	Top wiper	Telemetry Prepared
High capacity starter battery	Spot light activation continuous / directional	Dynamic Stability System
Tie downs	Dual Side View Mirrors	Speed Reduction in Corners
DRIVE	Panoramic Mirror	Seat Side Direction Control
Single pedal inch brake	LED Work lights	Foot Direction Control
Dual brake pedal	High Performance LED Work lights	Hyster Tracker™ Wireless Monitoring
Tyres - Super Elastic	Rear reflector	Hyster Tracker™ Wireless Access
Tyres - Super Elastic - Non Marking	LED Rear light package Brake/Tail/Backup	Hyster Tracker™ Wireless Verification
Tyres - Pneumatic Radial	LED Rear light package Brake/Tail/Backup/Turn	APPEARANCE
Tyres - Pneumatic	LED Rear light package Brake/Tail/Backup/Turn/Hazards	Hyster yellow paint base truck
Wide tread tyres	Switch Activated Strobe Light	Special paint base truck
Dual tread tyres	Audible Reverse Alarm	SUPPLEMENTAL
Steer Column with Tilt and Telescope	Forward and Reverse Alarm	12 Month / 2000 hour Limited Warranty
Steering Column Mounted Directional Control	LED Mast Mounted lights	36 Month / 6000 hours Limited
Steering Wheel with Spinner Knob	Blue LED Pedestrian Awareness Spotlights	Powertrain Warranty
Steer Column with Infinitely Adjustable Tilt	Red LED Pedestrian Awareness Perimeter Lines	PRELIMINARY
On Demand Power Steering	Rear View Camera System Integrated in 178mm Colour Display	Option availability varies by region
On Demand Power Steering with Synchronous Steering	Rear View Camera System with Rear-Mounted Display	
LIFT	Automatic (Ambient Light Level) Work Light Control	
2 Stage Limited Free Lift Mast – Class II/III	ERGONOMICS <small>PRELIMINARY</small>	
2 Stage Full Free Lift Mast – Class II/III	Rectangular guard	
3 Stage Full Free Lift Mast – Class II/III	Operator fan	
3° Forward / 6° Back Mast Tilt	Starter battery dangle	
6° Forward / 6° Back Mast Tilt	Engine block heater	
6° Forward / 10° Back Mast Tilt	Plastic Rain top	
10° Forward / 6° Back Mast Tilt	Figure 8 Tube Over Head Guard	
Standard Displacement Hydraulic Pump	Grid Style Overhead Guard	
On Demand Hydraulic Pump (VDP)		



HYSTER


D3

HYSTER 3.0R



HYSTER EUROPE
Centennial House, Building 4.5, Frimley Business Park,
Frimley, Surrey, GU16 7SG, United Kingdom

Visit us online at www.hyster.com or call us at **+44 (0) 1276 538500**.

HYSTER-YALE UK LIMITED trading as Hyster Europe.
Registered Address: Centennial House, Building 4.5, Frimley Business Park, Frimley, Surrey GU16 7SG, United Kingdom.
Registered in England and Wales. Company Registration Number: 02636775.
© HYSTER-YALE UK LIMITED. 2024, all rights reserved. Hyster and  are trademarks of Hyster-Yale Group, Inc.
Hyster products are subject to change without notice. Trucks may be shown with optional equipment.



Safety: This truck conforms to the current EU requirements